

Glow UFO High Bay



Industrial Range

CODE: GLOWUFO-200NW/MS

QVIS®
LED LIGHTING



TECHNICAL DRAWINGS

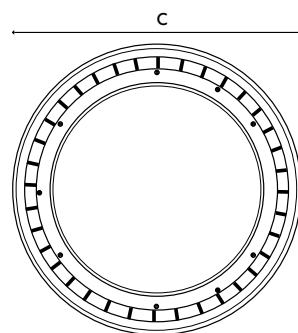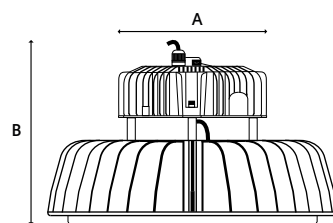


A = 150mm C = 260mm
B = 165mm

Specification	Glow UFO
System Power	200W
Sensor Driver	Merrytek
LED Chipset	Samsung
Colour Rendering Index	>85
Lumen Output	28000Lm
LED Efficacy	140 Lm/cW
Power Factor	>0.9
Sensor Type	Microwave
IP Rating	IP65
IK Rating	IK08
Colour Temperature	4000K
Beam Spread	120°
Housing Material	Aluminium
Diffuser Material	Tempered Glass
Operating Temperature	-20 to +50°C
Input Voltage	AC200-240V, 47-63Hz
Dimensions	260mm x 165mm
Weight	4.8kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
CE Standards	EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

LUMINOUS INTENSITY DISTRIBUTION

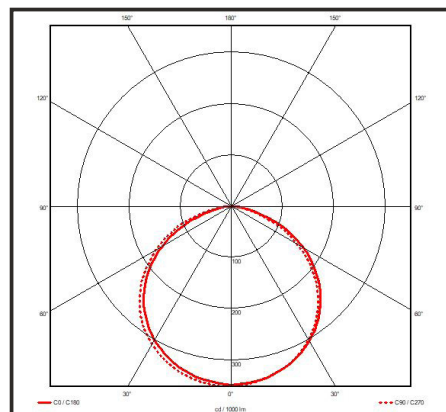

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com

Microwave Sensor



1. Features



- Operating voltage 120~277V AC,
- Patented microwave antenna, mounting height is 15m Max
- Supports high-sensitivity and low-sensitivity modes (for metal ceilings, metal reflector mounting environments)
- Work with 1-10V dimmable LED driver, easy to achieve 2-step or 3-step dimming function.
- New patented remote control to adjust the transmitting angle to avoid misuse
- Dim+/Dim- to set occupancy light level

2.Parameter

Input	Operating Voltage Range	108-305V AC, 50Hz/60Hz
	DC Input Voltage	N/A
	Rated Voltage	120-277Vac,60Hz
	No-load Power	N/A
	Stand-by Power	<1W
	Surge Test	L--N: 1kV
Output	Working Mode	ON/OFF function, 1-10V step dimming
	Type of Load	Inductive or resistive Load
	Load Capacity	120VAC: 4A; 220-277VAC: 3A
	Current of Load	N/A
	Max. Surge Capacity	50A (50% Ipeak, twidth =500uS, 230Vac full load, cold start); 80A (50% Ipeak, twidth =200uS, 230Vac, full load, cold start)
Dim Interface	1-10V Dimming	< 50mA (Non-constant source) 10%(1.4-1.6V), 20%(1.9-2.1V), 30%(2.9-3.1V), 50% (4.9-5.1V)
	Synchronous Control	N/A
	High Low-level	N/A
	PWM Control	N/A
Sensor Parameters	Operating Frequency	5.8 GHz \pm 75 MHz, ISM Band.
	Transmitting power	0.5mW Max.
	Hold time	5s/30s/1min/3min/5min/10min/20min/30min
	Stand-by DIM Level	10%/20%/30%/50%
	Stand-by Period	0s/10s/1min/3min/5min/10min/30min/+ ∞
	Detection Area	25%/50%/75%/100%

Microwave Sensor



Sensor Parameters	Daylight Sensor	5lux/15lux/30lux/50lux/100lux/150lux/Disable (Ambient light diffusion)
	Detecting Radius	See detection pattern
	Mounting Height	15m Max
	Detecting Angle	150°(wall mounting), 360°(ceiling mounting)
Wireless Module	Operating Frequency	N/A
	Transmitting power	N/A
	Transmitting distance	N/A
	Modulation mode	N/A
	Number of coding	N/A
Operating Environment	Operating Temperature	-35℃...+55℃
	Storage Temperature	Temperature:-40℃...+80℃;Humidity:10%-95% (non-condensing)
Certificate Standards	Safety standards	IEC60669-2-1, IEC60669-1 AS/NZS 60669.1, AS/NZS 60669.2.1 UL60730-1
	EMC standards	EN55015, EN61000-3-2, EN61000-3-3, EN61547 AS/NZS CISPR 15, AS/NZS 4268 FCC Part 15C, Part 15B EN 60950-1, EN301489-1, EN 201489-3, EN300440
	Environmental Requirement	Compliant to RoHS
	Certificate	cULus, CE, SAA, FCC, RED
Others	Wiring	SJTW,5*18AWG (USA); H05RR-F,5*18AWG (Europe,Australia); exposed line length: 810-830mm
	Wiring color	Sheath: Black Core: Red,White,Black,Gray,Purple (US); blue, brown, red, purple,Gray (Europe, Australia)
	IP Rating	IP65
	Protection Class	Class II
	Installation	Independent
	Dimension	(ΦxH)72*59mm
	Package	Instruction+ White box+ White box tags+ Clapboard+ Carton(K=A)
	Net Weight	MC054V RC A: 225g, MC054V RC B:246g, MC054V RC C:225g , MC054V RC D:165g
	Lifetime	5 years warranty @Ta 230V full load


Note

1. "N/A"means not available.
2. Detection area is effected on volume of motion object and motion speed. The detection area is tested by a 165cm height person and walking speed is 0.5m/s.


Microwave Sensor

3. Function


1) On/OFF Function (stand-by period be set to "0"s)

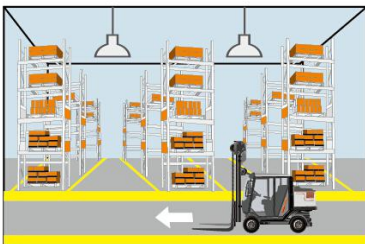

- 1 With sufficient ambient light, the light will not be switched on even if with motion signal.

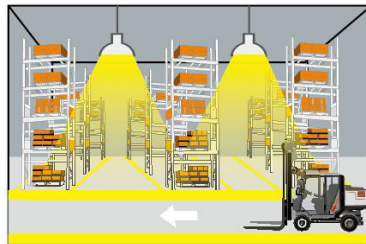

- 2 With insufficient ambient light, the sensor switches on the light when motion is detected.

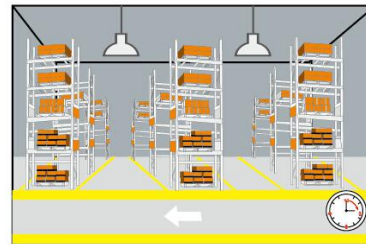


- 3 After elapse of hold time, the sensor switches off the light when no motion is detected.


2) 2-step dimming function (stand-by period be set to "+∞")



- 1 If there is no motion detected, the light will be remained at a low light level all the time.

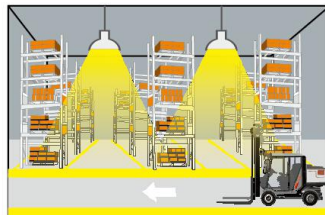


- 2 When motion is detected, the sensor will switch on the light to 100% brightness

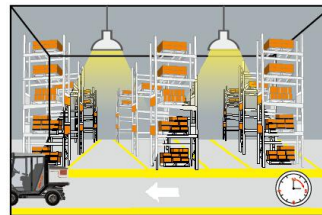


- 3 After elapse of hold time, the sensor dims the light at the present low light level if no motion is detected.


3) 3-step dimming function (stand-by period be set to "10s/1min/3min/5min/10min/30min")

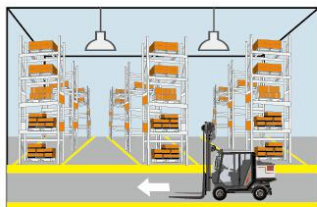


- 1 With sufficient ambient light, the light will not be switched on even if with motion signal.

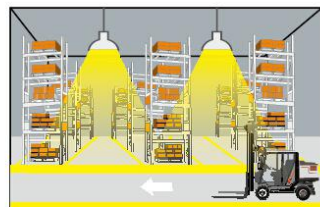

- 2 With insufficient ambient light, the sensor switches on the light when motion is detected.

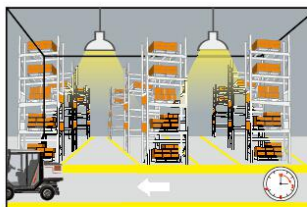

- 3 After elapse of hold time, the sensor dims the light at a low light level if no new motion is detected.

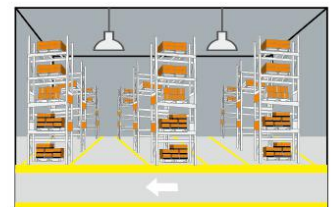



- 4 After elapse of standby period, the sensor switches off the light if no motion is detected in the detection zone.



Microwave

QVIS®
LED LIGHTING


4.Dimension (mm)

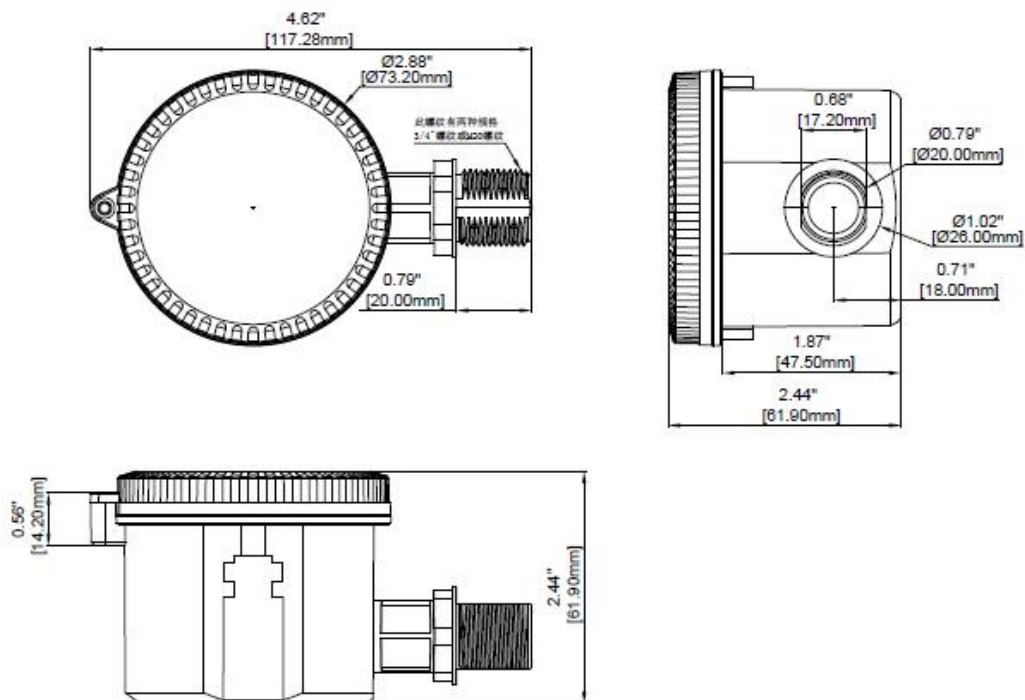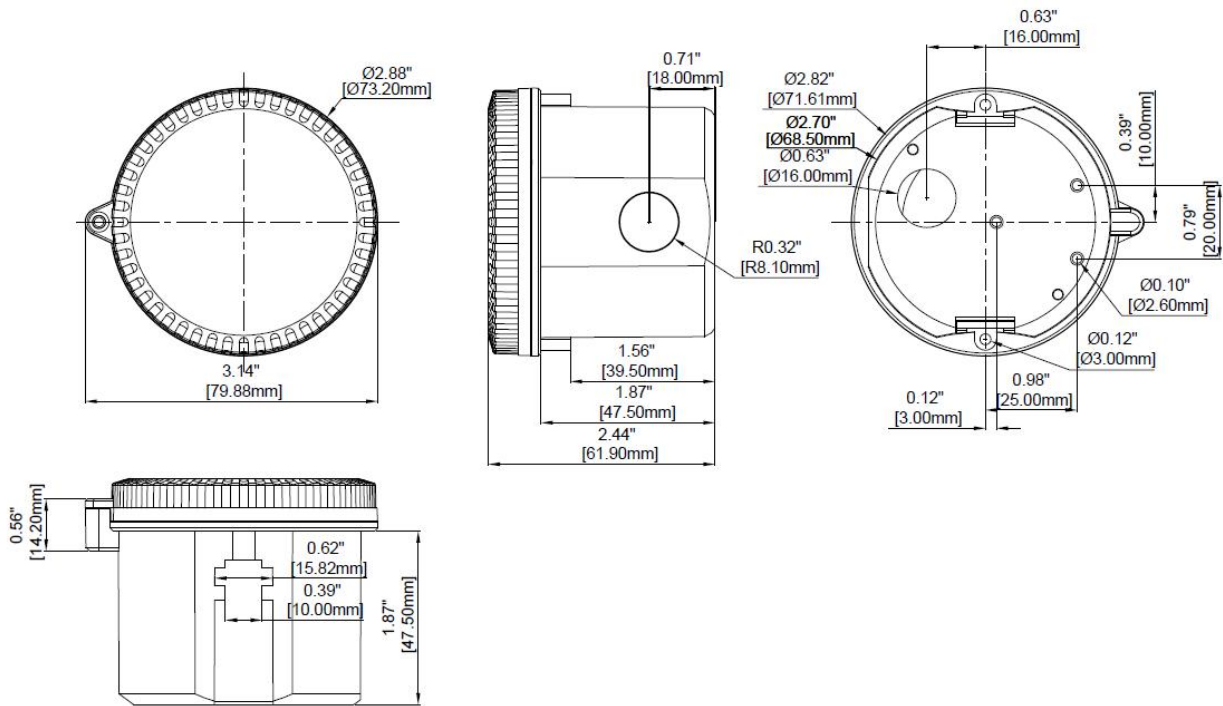

Microwave Sensor




5. Wiring

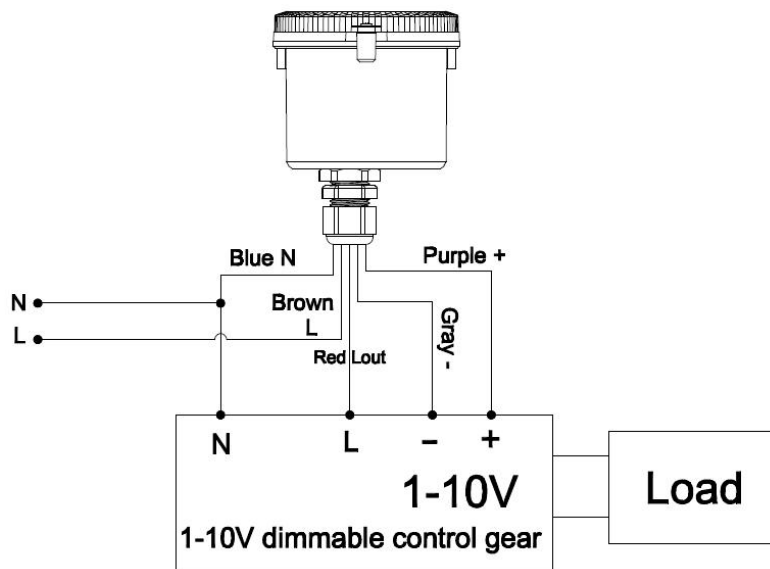

*The sensor is designed for connect one load only. Connect more than one loads may damage the sensor.

6. Function Diagram

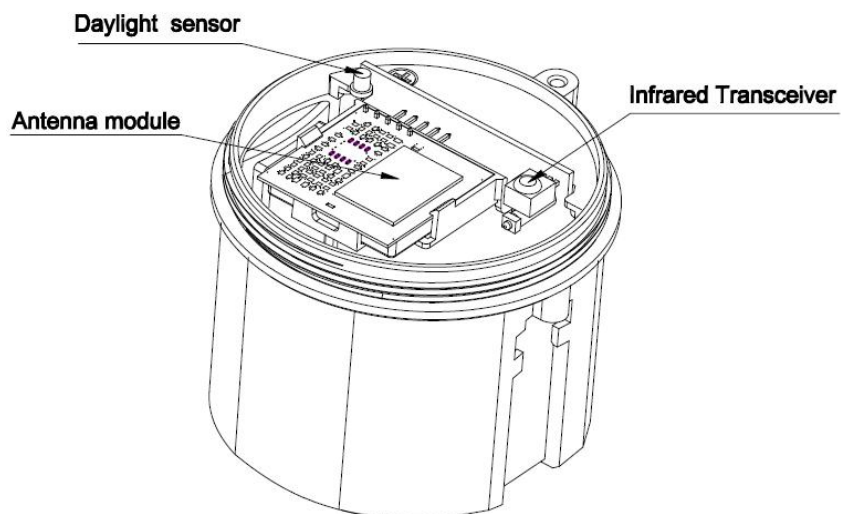


Microwave Sensor



7. Radiation Pattern


Ceiling mounting

Ceiling mounted
height: 3m
Sensitivity:
100%/75%/50%/25%




Normal moving
(Speed:1m/s)

Ceiling mounted
height: 6m
Sensitivity:
100%/75%/50%/25%




Normal moving
(Speed:1m/s)

Ceiling mounted
height: 9m
Sensitivity:
100%/75%/50%/25%




Normal moving
(Speed:1m/s)

Ceiling mounted
height: 12m
Sensitivity:
100%/75%/50%




Normal moving
(Speed:1m/s)


Ceiling mounted
height: 15m
Sensitivity:
100%/75%




Normal moving
(Speed:1m/s)




Slow moving
(Speed 0.3m/s)




Slow moving
(Speed: 0.3m/s)



Slow moving
(Speed: 0.3m/s)



Slow moving
(Speed: 0.3m/s)




Slow moving
(Speed: 0.3m/s)


*Only 100%/75%/50% detection sensitivity is workable when installed at 10m & 15m mounting height. 25% sensitivity is not able to detect motion signal.

Wall mounting

Horizon mounted height: 2m
Sensitivity: 100%/75%/50%/25%

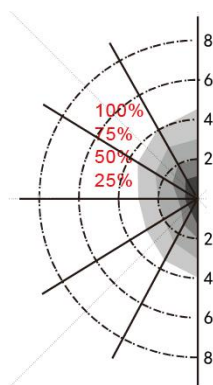

Normal moving (Speed: 1m/s)

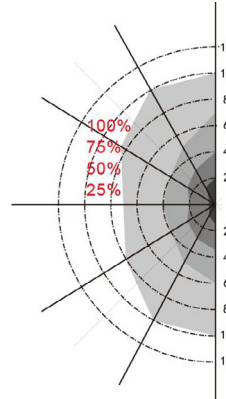


Slow moving (Speed 0.3m/s)



Microwave

Sensor

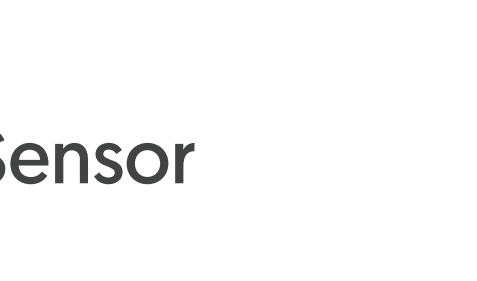

Sensor

Sensor

Sensor

QVIS®
LED LIGHTING

Sensor

Sensor

QVIS®
LED LIGHTING

Sensor

Sensor

QVIS®
LED LIGHTING

11. Override Function

Switch on and off power 3 times to cancel sensor function, switch on and off one time to recover sensor function

12. Application Notice

- 1) The sensor should be installed by a professional electrician. Please turn off the power before installing, wiring, changing the setting of the DIP switch.
- 2) The sensor which installed in the plastic and glass lampshade will reduce the sensitivity. For every 3mm increase in thickness, the sensitivity will be reduced by 20%.
- 3) The dimming performance could be different from different 1-10v drivers.
- 4) The light sensitivity threshold is in a sunny environment, no shadow and ambient light diffuse reflection. Ambient lux level could be different in different environment, weather, climate, time-of-day and season.
- 5) The parameters of the sensor may need to be reconfigured in different installation environments. Please refer to the following instructions or contact the manufacturer.
- 6) This sensor is for indoor use only. It will affect the waterproof effect for outdoor use. Wind, rain, and moving objects around will cause false triggering.
- 7) The distance between any inductive sensors should be greater than 3m.
- 8) Do not place the sensor close to high-density objects such as metal, glass, concrete walls, etc, false triggering could happen. When the sensor is installed in a metal lamp, metal reflective surface, or a narrow enclosed environment, the microwave will be reflected repeatedly and cause false triggering. Please reduce the sensitivity or contact the manufacturer for technical support.
- 9) Please ensure that there are no moving signals around the sensor, such as fan, DC motor, sewer pipe, air outlet, etc., the sensor may generate false trigger.
- 10) You are advised to test 5 samples before mass application of sensor in a new lighting project.
- 11) Due to continuous improvement, the contents of this instruction could be changed without prior notice.