

# Q-FLOOD PIR FLOODLIGHT

QFLOOD-10W/PIR




Q-DRIVE

Driver as Standard

OSRAM

LED's inside

### TECHNICAL DRAWINGS

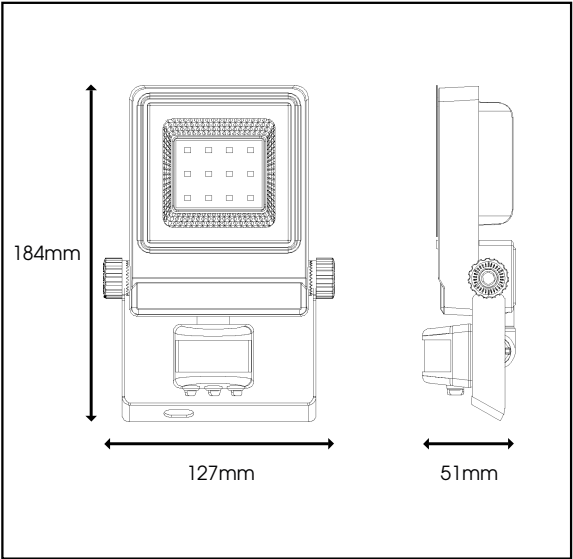

| Specification         | QFlood PIR                                                                                                       |
|-----------------------|------------------------------------------------------------------------------------------------------------------|
| System Power          | 10W                                                                                                              |
| Driver Manufacturer   | Q-Drive                                                                                                          |
| LED Chipset           | Osram                                                                                                            |
| Lumen Output          | 1100Lm                                                                                                           |
| LED Efficacy          | 110 Lm/cW                                                                                                        |
| Beam Angle            | 120°                                                                                                             |
| PIR Sensitivity       | Up to 10m                                                                                                        |
| PIR Time Delay        | 10sec±3sec (min), 7min±2min (max)                                                                                |
| IP Rating             | IP65                                                                                                             |
| Colour Temperature    | 6000K                                                                                                            |
| Housing Material      | Aluminium                                                                                                        |
| Lens Material         | Tempered Glass                                                                                                   |
| Input Voltage         | AC85-277V, 50-60Hz                                                                                               |
| Operating Temperature | -20 to 50 °C                                                                                                     |
| Cable Flex            | 1m                                                                                                               |
| Weight                | 0.55kg                                                                                                           |
| Dimensions            | 184mm x 127mm x 51mm                                                                                             |
| MacAdam Step          | 2.8                                                                                                              |
| Lifetime              | 50,000 hours, L70-B10 (Ta 25 °C)                                                                                 |
| CE Standards          | EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581 |
| CE Directives         | LVD, EMC, ERP & RoHS                                                                                             |

\* Warranty terms and conditions apply