

External



IP65 Ingress Protection



IK10 Impact Resistance




Conduit Back Entry




Tri-Colour (3000K/4000K/5000K)

Dimensions

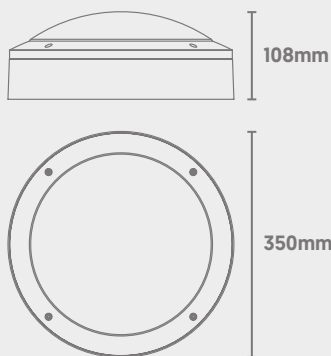

Light Source
Energy Rating

Photometric Data

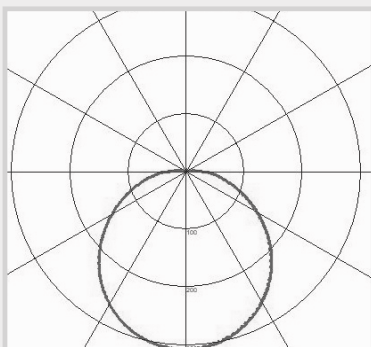

Eclipse

Tri-Colour Bulkhead

CODE: EC-18-TC/D/EM

QVIS[®]
LED LIGHTING



Power	Efficacy	Output	Kelvin
18W [Emergency 3W]	105Lm/cW	1890Lm [Emergency 315Lm]	Tri-Colour: 3000K, 4000K or 5000K

Technical

Input Voltage	AC 200-240V
Colour Rendering Index	>80
Power Factor	>0.95
Operating Temp.	-15 to +50°C
Materials	Die-Cast Aluminium & Polycarbonate
IP Rating	IP65
IK Rating	IK10
Dimmable	On Request
Dimensions	350mm x 108mm
Weight	2.67kg
MacAdam Step	<3
Emergency Output	3 Hours [3W]
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS