

## External



IP66 Ingress Protection



IK08 Impact Resistance





6Kv Surge Protection




76mm Spigot Size

### Dimensions

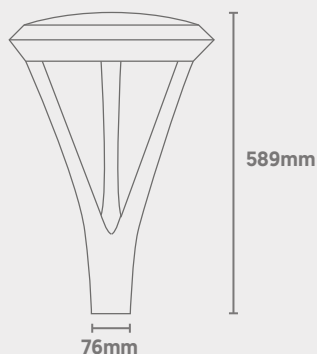

Light Source  
Energy Rating

### Photometric Data

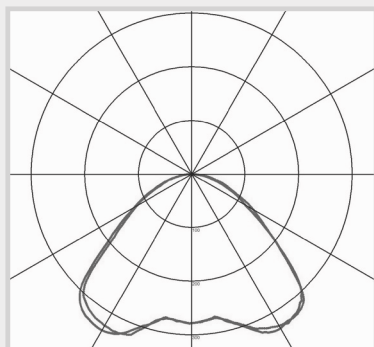

# Leo

## Post-Top Luminaire

CODE: LEO-58NW

**QVIS**<sup>®</sup>  
LED LIGHTING



| Power | Efficacy | Output | Kelvin |
|-------|----------|--------|--------|
| 58W   | 105Lm/cW | 6090Lm | 4000K  |

### Technical

|                        |                                                                                                          |
|------------------------|----------------------------------------------------------------------------------------------------------|
| Input Voltage          | AC 100-277V                                                                                              |
| Colour Rendering Index | >80                                                                                                      |
| Beam Spread            | 110°                                                                                                     |
| Operating Temp.        | -40 to +45°C                                                                                             |
| Materials              | Die-Cast Aluminium                                                                                       |
| IP Rating              | IP66                                                                                                     |
| IK Rating              | IK08                                                                                                     |
| Surge Protection       | 6Kv                                                                                                      |
| Dimmable               | On Request                                                                                               |
| Dimensions             | 589mm x 400mm                                                                                            |
| Weight                 | 8.8kg                                                                                                    |
| MacAdam Step           | <3                                                                                                       |
| Lifetime               | 50,000 hours, L90-B10<br>(Ta 25 °C)                                                                      |
| CE Standards           | EN60598-1, EN62493, EN55015, EN61547,<br>EN61000-3-2, EN61000-3-3, EN62722-1,<br>EN62722-2-1 and EN50581 |
| CE Directives          | LVD, EMC, ERP & RoHS                                                                                     |