

QFlood Asymmetric Commercial Flood


External Range

CODE: QFLOOD-150CW/AS

QVIS[®]
LED LIGHTING



TECHNICAL DRAWINGS

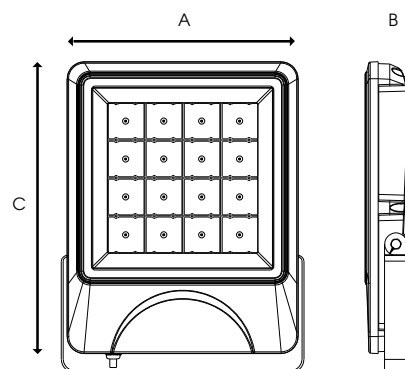


A = 305mm C = 385mm
B = 58mm

Specification	QFlood Commercial
System Power	150W
Driver Manufacturer	Mean Well
LED Chipset	Osram
Colour Rendering Index	>80
Lumen Output	18000Lm
LED Efficacy	120 Lm/cW
Power Factor	0.95
IP Rating	IP66
Colour Temperature	6000K
Beam Spread	150°x75°
Housing Material	Aluminium
Lens Material	Glass
Cable Flex	1.5m
Operating Temperature	-25 to +50 °C
Input Voltage	AC85-277V, 50/60 Hz
Dimensions	385mm x 305mm x 58mm
Weight	5.1kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

LUMINOUS INTENSITY DISTRIBUTION

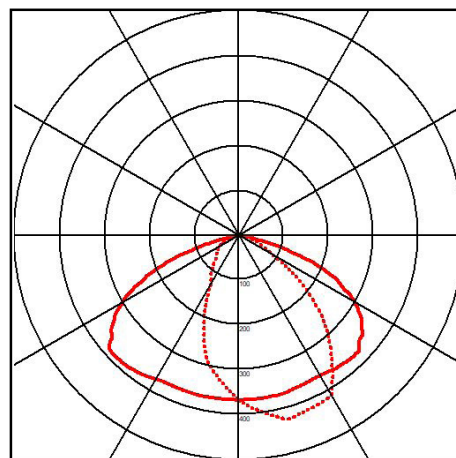

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com