

QFlood Asymmetric Commercial Flood

External Range

CODE: QFLOOD-200CW/AS

QVIS[®]
LED LIGHTING




200W
Power

5YR
Warranty*

IP66


24000
Lumens

TECHNICAL DRAWINGS

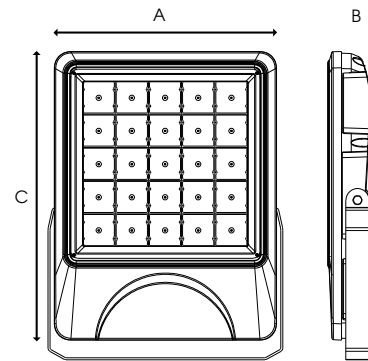

A = 335mm C = 435mm
B = 65mm

LUMINOUS INTENSITY DISTRIBUTION

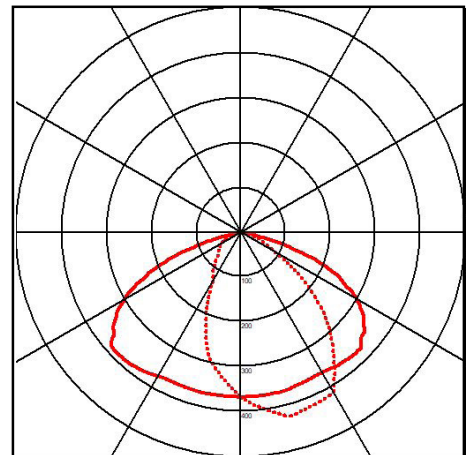

Specification	QFlood Commercial
System Power	200W
Driver Manufacturer	Mean Well
LED Chipset	Osram
Colour Rendering Index	>80
Lumen Output	24000Lm
LED Efficacy	120 Lm/cW
Power Factor	0.95
IP Rating	IP66
Colour Temperature	6000K
Beam Spread	150°x75°
Housing Material	Aluminium
Lens Material	Glass
Cable Flex	1.5m
Operating Temperature	-25 to +50 °C
Input Voltage	AC85-277V, 50/60 Hz
Dimensions	435mm x 335mm x 65mm
Weight	6.7kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com