

# Q-STREET PRO PHOTOCELL SENSOR

QSTREET-PRO-PCELL


QVIS<sup>®</sup>

LIGHTING & SECURITY



- *ANSI C136.10-1996 Twist Lock*
- *Time Delay of 3-20 seconds*
- *Surge Arrester Built-In*
- *Photodiode Sensor*
- *Fail-On Mode*

## INSTALLATION GUIDE

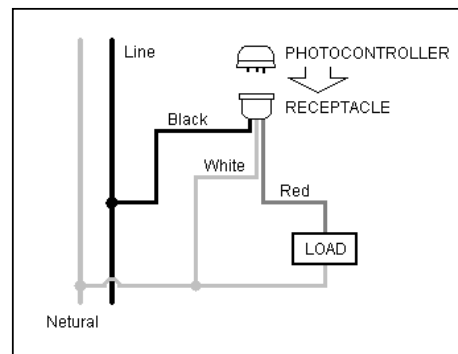

Specification	Photocell Sensor
Rated Voltage	110-120VAC
Applicable Voltage Range	100-140VAC
Rated Frequency	50/60Hz
Rated Loading	1000W Tungsten, 1800VA Ballast
Power Consumption	1.5VA (3VA for -HP)
On/Off Level	6Lx On, 50Lx Off
Ambient Temperature	-40 to 70 °C
Related Humidity	99%
Dimensions	84mm x 66mm
Weight	0.085kg

EXTERNAL RANGE