

Blade Surface Exit Sign

Emergency Range

CODE: BLADE-3/SUS


QVIS[®]
LED LIGHTING



| Specification | Blade |
|-----------------------------------|--|
| System Power | 3W |
| Driver Manufacturer | Q-Drive |
| LED Chipset | Epistar |
| Lumen Output | 150Lm |
| Discharge Duration | 3 Hours |
| Viewing Distance | 26m |
| IP Rating | IP20 |
| Legend | Supplied In Box |
| Emergency Type | Non-Maintained |
| Colour Temperature | 4000K |
| Housing Material | Polycarbonate |
| Operating Temperature | 0 to +50 °C |
| Input Voltage | AC200-240V |
| Dimensions (Including Suspension) | 700mm x 300mm x 45mm |
| Weight | 0.9kg |
| MacAdam Step | <3 |
| Lifetime | 50,000 hours, L70-B10 (Ta 25 °C) |
| CE Standards | EN60598-1, EN 60598 2-22, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3- 3, EN62722-1, EN62722-2-1 and EN50581 |
| CE Directives | LVD, EMC, ERP & RoHS |

* Warranty terms and conditions apply

TECHNICAL DRAWINGS

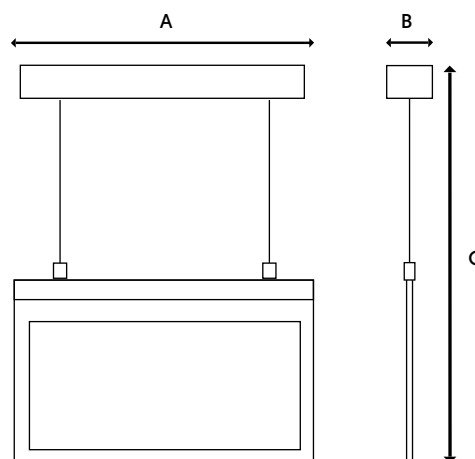

A = 300mm C = 700mm
B = 45mm

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com