





POLO ARCHITECTURAL LUMINAIRE

POLO-35-400-SNW

QVIS®

LIGHTING & SECURITY

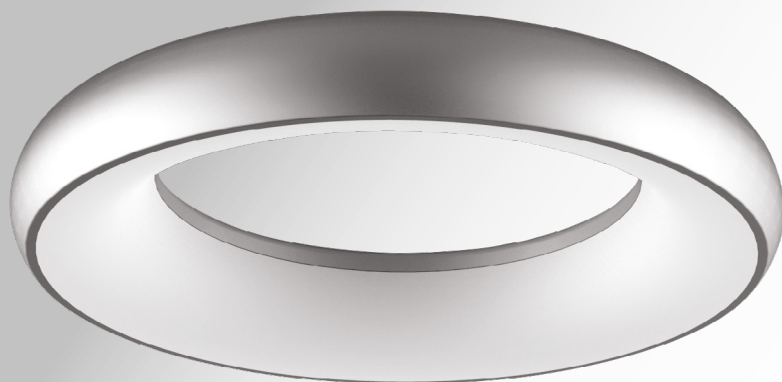

Q-DRIVE

Driver as Standard


EPISTAR

LED's inside


Specification	POLO-35-400-SNW
System Power	35W
LED Chipset	Epistar
Driver Manufacturer	Q-Drive
Colour Rendering Index	>80
Lumen Output	3290Lm
LED Efficacy	94 Lm/cW
Power Factor	0.9
IP rating	IP40
Beam Spread	120 °
Colour Temperature	4000K
Operating Temperature	-30 to 45 °C
Input Voltage	AC200-240V
Weight	1.55kg
Dimensions	ø400mm x 67mm
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

TECHNICAL DRAWINGS

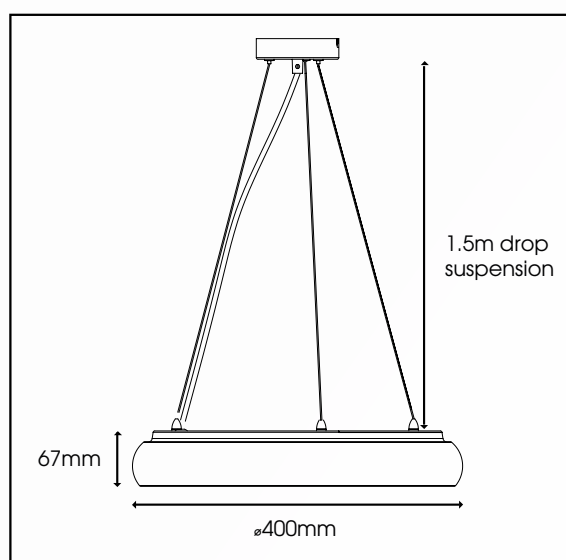

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

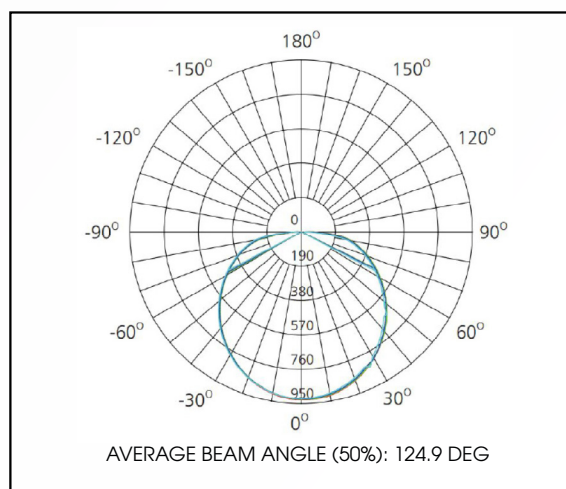

SURFACE & SUSPENDED RANGE