

QLINE DUAL-WATTAGE BATTEN

QLINE-WS-1200NW/EM

QVIS®

LIGHTING & SECURITY



3HR
EMERGENCY
3W BATTERY

10-32W
POWER

5YR
WARRANTY
1YR
ON-SITE

IP20

1200-3840
LUMENS


BOKE

Driver as Standard


EPISTAR

LED's inside

TECHNICAL DRAWINGS

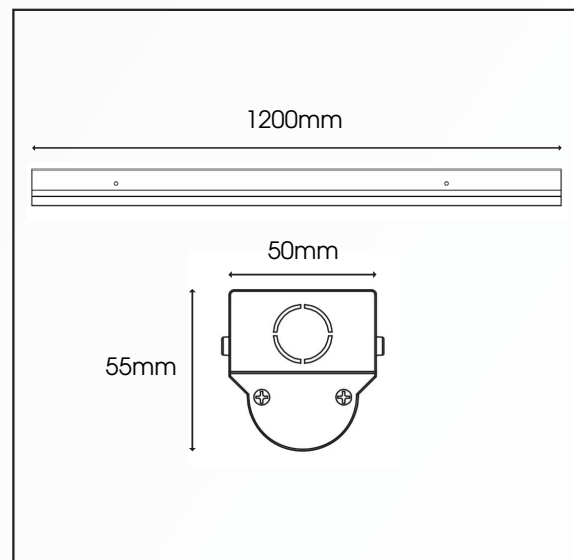

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

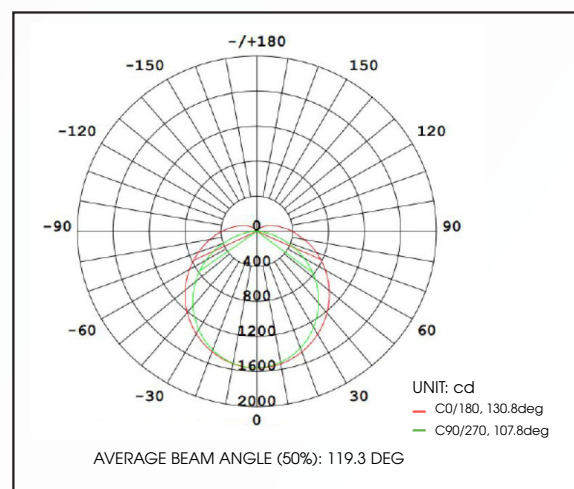

Specification	QLINE WS 1200
System Power	10-32W (Emergency 3W)
LED Chipset	Epistar
Driver Manufacturer	Boke
Colour Rendering Index	>85
Lumen Output	1200 - 3840Lm (Emergency 360Lm)
LED Efficacy	120 Lm/cW
Power Factor	0.9
IP Rating	IP20
Beam Spread	120 °
Colour Temperature	4000K
Housing Material	Aluminium
Diffuser Type	Polycarbonate
Operating Temperature	-20 to 50 °C
Input Voltage	AC 200-240V, 47-63Hz
Weight	0.9kg
Dimensions	1200mm x 50mm x 55mm
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
Emergency Output	3 Hours (3W)*
CE Standard	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

*For emergency products with a rated service life of < 50,000 operating hours, QVIS offers a 5-year warranty period on the luminaire and 1-year warranty period on the battery pack