

# Taurus Tri-Colour Bulkhead

Surface & Suspended Range

CODE: TAU-16-325TC/QE

**QVIS**<sup>®</sup>  
LED LIGHTING



**3HR**  
Emergency  
3W Battery

**IP65**

**16W**  
Power

**5YR**  
Warranty

**IK10**

**Tri  
Colour**

**1680**  
Lumens

**DALI 2**


**Switch Dim**

**1-10V**

Specification	Taurus
System Power	16W [Emergency 3W]
Driver Manufacturer	Q-Drive
LED Chipset	Epistar
Colour Rendering Index	>80
Lumen Output	1680Lm [Emergency 315Lm]
LED Efficacy	105 Lm/cW
Power Factor	>0.9
Dimmable	DALI / Switch-Dim / 1-10V
IP Rating	IP65
IK Rating	IK10
Colour Temperature	3000K / 4000K / 6000K
Housing Material	Polycarbonate
Diffuser Material	Polycarbonate
Operating Temperature	-20 to +40 °C
Input Voltage	AC220-240V
Dimensions	325mm x 109mm
Weight	0.89kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
Emergency Output	3 Hours [3W]
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS


\* Warranty terms and conditions apply

## TECHNICAL DRAWINGS

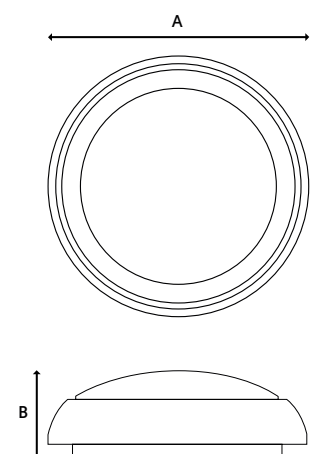

**A = 325mm    B = 109mm**

## LUMINOUS INTENSITY DISTRIBUTION

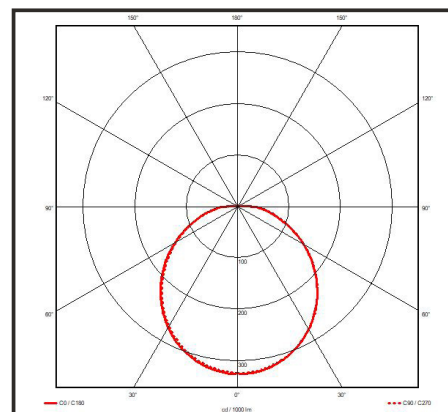

**Information is subject to change and can be withdrawn without notice**

For further information on our products or terms and conditions visit our website [www.qvis.co.uk/lighting](http://www.qvis.co.uk/lighting) or email: [sales@qvislighting.com](mailto:sales@qvislighting.com)