



# VEX BULKHEAD

VEX-10/15-300NW/TE

**QVIS®**

LIGHTING & SECURITY



**TRIDONIC**  
enlightening your ideas

Driver Manufacturer

**EPISTAR**

LED's inside

| Specification               | VEX                                                                                                |
|-----------------------------|----------------------------------------------------------------------------------------------------|
| System Power                | 10W/15W (Emergency 3W)                                                                             |
| Driver Manufacturer         | Tridonic                                                                                           |
| LED Chipset                 | Epistar                                                                                            |
| Colour Rendering Index      | >80                                                                                                |
| Lumen Output                | 1050Lm/1575Lm (Emergency 315Lm)                                                                    |
| LED Efficacy                | 105 Lm/cW                                                                                          |
| Dimmable                    | Dali / Switch-Dim / Corridor / DSI                                                                 |
| IK Rating                   | IK10                                                                                               |
| IP Rating                   | IP66                                                                                               |
| Power Factor                | 0.997                                                                                              |
| Fire Rating                 | TP(a)                                                                                              |
| Housing & Diffuser Material | Polycarbonate                                                                                      |
| Beam Spread                 | 120 °                                                                                              |
| Colour Temperature          | 4000K                                                                                              |
| Operating Temperature       | -20 to 30 °C                                                                                       |
| Weight                      | 0.6kg                                                                                              |
| Dimensions                  | ø300mm x 95mm                                                                                      |
| MacAdam Step                | <3                                                                                                 |
| Lifetime                    | 50,000 hours, L70-B10 (Ta 25 °C)                                                                   |
| Emergency Output            | 3 Hours (3W)*                                                                                      |
| CE Standards                | EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581 |
| CE Directives               | LVD, EMC, ERP & RoHS                                                                               |

\* Warranty terms and conditions apply

\*For emergency products with a rated service life of < 50,000 operating hours, QVIS offers a 5-year warranty period on the luminaire and 1-year warranty period on the battery pack



SWITCH DIM




10% CORRIDOR




DSI

## TECHNICAL DRAWINGS

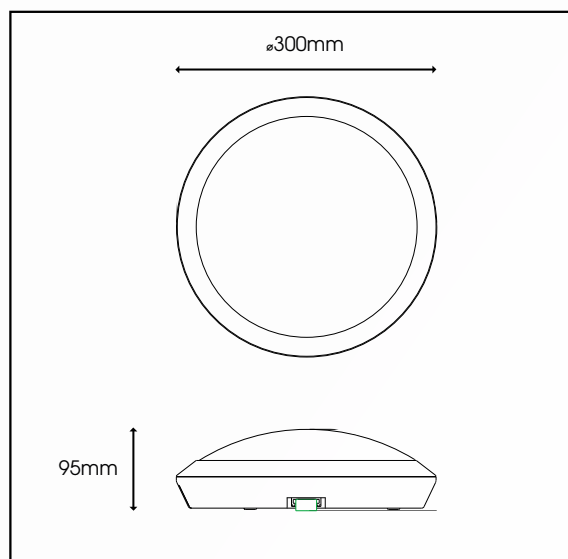

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

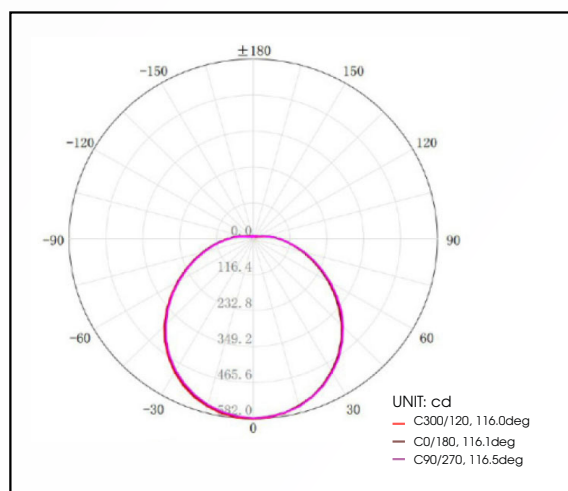

SURFACE & SUSPENDED RANGE

For further information on our products or terms and conditions visit our website  
www.qvisled.com or email: sales@qvislighting.com