

Vex Commercial Bulkhead


Surface & Suspended Range

CODE: VEX-20-360NW/QD

QVIS[®]
LED LIGHTING




TECHNICAL DRAWINGS

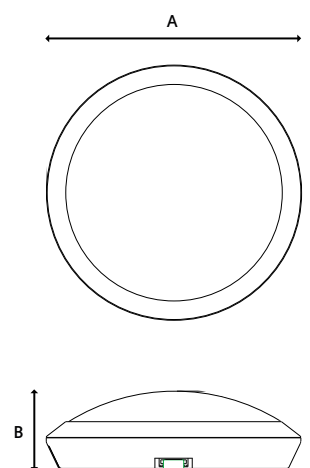

A = 360mm B = 105mm

LUMINOUS INTENSITY DISTRIBUTION

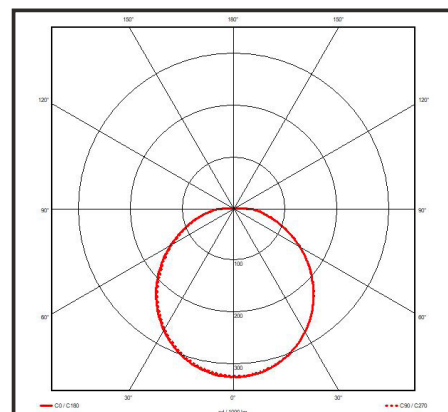

Specification	Vex
System Power	20W
Driver Manufacturer	Q-Drive
LED Chipset	Samsung
Colour Rendering Index	>80
Lumen Output	2100Lm
LED Efficacy	105 Lm/cW
Power Factor	0.997
Dimmable	DALI / Switch-Dim / 1-10V
IP Rating	IP66
IK Rating	IK10
Fire Rating	TP[a]
Colour Temperature	4000K
Housing Material	Polycarbonate
Diffuser Material	Polycarbonate
Operating Temperature	-20 to +30 °C
Input Voltage	AC220-240V
Dimensions	360mm x 105mm
Weight	0.9kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com