

Vex Tri-Colour Commercial Bulkhead


Surface & Suspended Range

CODE: VEX-20-360TC/QD

QVIS[®]
LED LIGHTING



TECHNICAL DRAWINGS

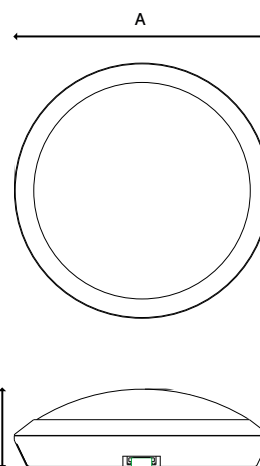


A = 360mm B = 105mm

Specification	Vex
System Power	20W
Driver Manufacturer	Q-Drive
LED Chipset	Samsung
Colour Rendering Index	>80
Lumen Output	2100Lm
LED Efficacy	105 Lm/cW
Power Factor	0.997
Dimmable	DALI / Switch-Dim / 1-10V
IP Rating	IP66
IK Rating	IK10
Fire Rating	TP[a]
Colour Temperature	3000K / 4000K / 6000K
Housing Material	Polycarbonate
Diffuser Material	Polycarbonate
Operating Temperature	-20 to +30 °C
Input Voltage	AC220-240V
Dimensions	360mm x 105mm
Weight	0.9kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

LUMINOUS INTENSITY DISTRIBUTION

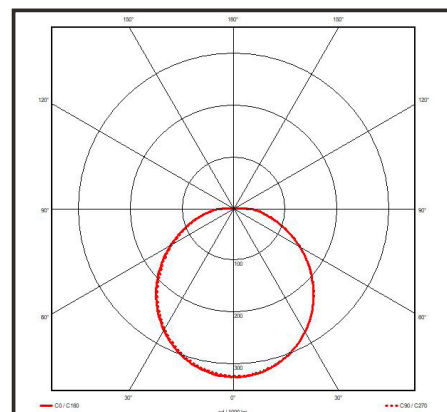

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com