


Vex Commercial Bulkhead


Surface & Suspended Range

CODE: VEX-25-420NW/TD

QVIS[®]
LED LIGHTING

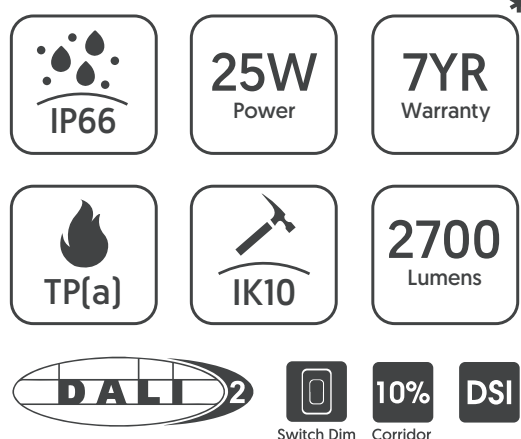


TECHNICAL DRAWINGS

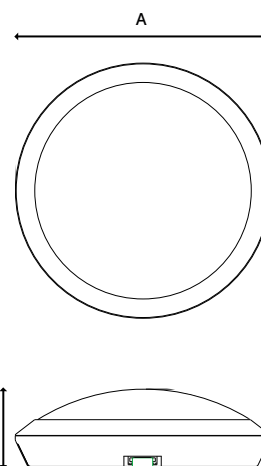

A = 420mm B = 112mm

LUMINOUS INTENSITY DISTRIBUTION

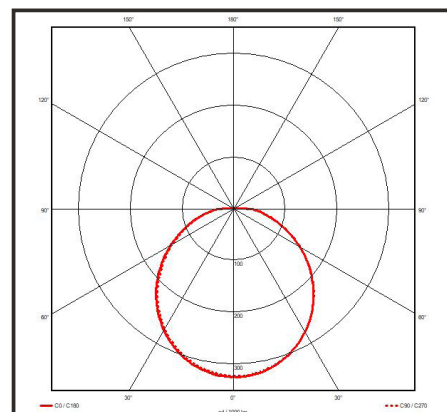

Specification	Vex
System Power	25W
Driver Manufacturer	Tridonic
LED Chipset	Samsung
Colour Rendering Index	>80
Lumen Output	2700Lm
LED Efficacy	108 Lm/cW
Power Factor	0.997
Dimmable	DALI / Switch-Dim / Corridor / DSI
IP Rating	IP66
IK Rating	IK10
Fire Rating	TP[a]
Colour Temperature	4000K
Housing Material	Polycarbonate
Diffuser Material	Polycarbonate
Operating Temperature	-20 to +40 °C
Input Voltage	AC220-240V
Dimensions	420mm x 112mm
Weight	1.6kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com