

AquaPack Tri-Colour & Multi-Power

Industrial Range

CODE: AQUA-WS-600TC/EM

QVIS[®]
LED LIGHTING



3HR
Emergency
3W Battery

IP66

**12W to
20W**
Power

5YR
Warranty


IK08

**Tri
Colour**

**1500 to
2500**
Lumens


Specification	AquaPack
System Power [Selectable]	12W / 14W / 17W / 20W [Emergency 3W]
Driver Manufacturer	Osram
LED Chipset	Epistar
Colour Rendering Index	>80
Lumen Output	1500Lm / 1750Lm / 2125Lm / 2500Lm [Emergency 375Lm]
LED Efficacy	125 Lm/cW
Power Factor	0.92
Dimmable	On Request
IP Rating	IP66
IK Rating	IK08
Colour Temperature	3000K / 4000K / 5000K
Beam Spread	120°
Housing Material	ABS Plastic
Diffuser Material	Polycarbonate (Opal)
Operating Temperature	-20 to +40 °C
Input Voltage	AC200-240V, 50/60Hz
Dimensions	590mm x 95mm x 75mm
Weight	0.77kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
Emergency Output	3 Hours [3W]
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

TECHNICAL DRAWINGS



A = 95mm C = 590mm
B = 75mm

LUMINOUS INTENSITY DISTRIBUTION

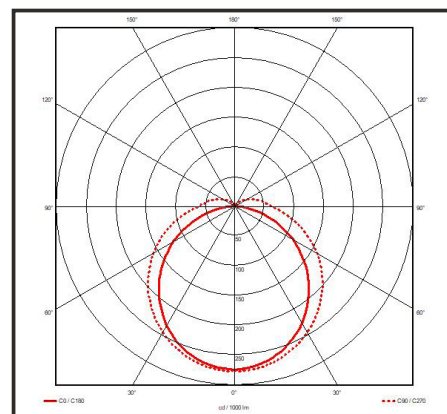

* Warranty terms and conditions apply

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com