


# AquaPack Tri-Colour & Multi-Power


## Industrial Range

CODE: AQUA-WS-1200TC

**QVIS**<sup>®</sup>  
LED LIGHTING

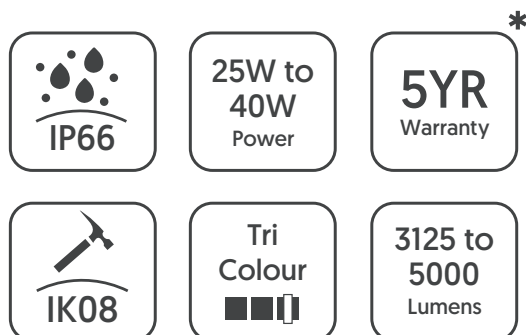

### TECHNICAL DRAWINGS




A = 95mm    C = 1190mm  
B = 75mm

| Specification             | AquaPack                                                                                           |
|---------------------------|----------------------------------------------------------------------------------------------------|
| System Power [Selectable] | 25W / 30W / 35W / 40W                                                                              |
| Driver Manufacturer       | Osram                                                                                              |
| LED Chipset               | Epistar                                                                                            |
| Colour Rendering Index    | >80                                                                                                |
| Lumen Output              | 3125Lm / 3750Lm / 4375Lm / 5000Lm                                                                  |
| LED Efficacy              | 125 Lm/cW                                                                                          |
| Power Factor              | 0.92                                                                                               |
| Dimmable                  | On Request                                                                                         |
| IP Rating                 | IP66                                                                                               |
| IK Rating                 | IK08                                                                                               |
| Colour Temperature        | 3000K / 4000K / 5000K                                                                              |
| Beam Spread               | 120°                                                                                               |
| Housing Material          | ABS Plastic                                                                                        |
| Diffuser Material         | Polycarbonate [Opal]                                                                               |
| Operating Temperature     | -20 to +40 °C                                                                                      |
| Input Voltage             | AC200-240V, 50/60Hz                                                                                |
| Dimensions                | 1190mm x 95mm x 75mm                                                                               |
| Weight                    | 1.26kg                                                                                             |
| MacAdam Step              | <3                                                                                                 |
| Lifetime                  | 50,000 hours, L70-B10 [Ta 25 °C]                                                                   |
| CE Standards              | EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581 |
| CE Directives             | LVD, EMC, ERP & RoHS                                                                               |

\* Warranty terms and conditions apply

### LUMINOUS INTENSITY DISTRIBUTION

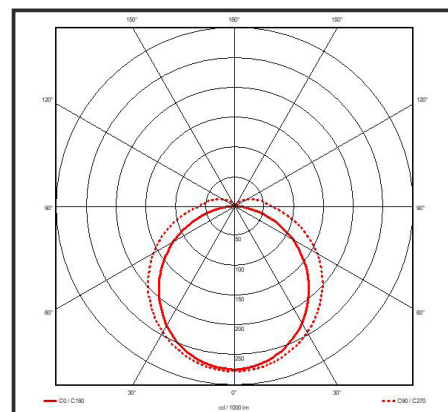

**Information is subject to change and can be withdrawn without notice**

For further information on our products or terms and conditions visit our website [www.qvis.co.uk/lighting](http://www.qvis.co.uk/lighting) or email: [sales@qvislighting.com](mailto:sales@qvislighting.com)