

# AquaPack Tri-Colour & Multi-Power

## Industrial Range

CODE: AQUA-WS-1200TC/EM

**QVIS**<sup>®</sup>  
LED LIGHTING



**3HR**  
Emergency  
3W Battery

**IP66**

**25W to  
40W**  
Power


**5YR**  
Warranty

**IK08**

**Tri  
Colour**


**3125 to  
5000**  
Lumens

### TECHNICAL DRAWINGS



**A = 95mm**    **C = 1190mm**  
**B = 75mm**

### LUMINOUS INTENSITY DISTRIBUTION

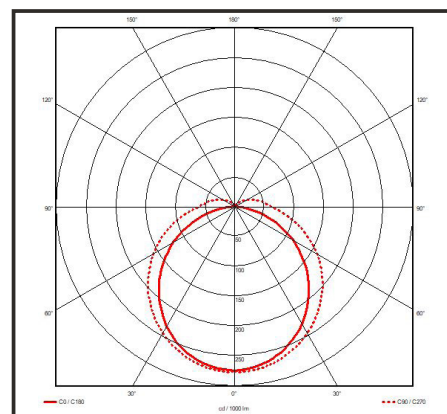

Specification	AquaPack
System Power [Selectable]	25W / 30W / 35W / 40W [Emergency 3W]
Driver Manufacturer	Osram
LED Chipset	Epistar
Colour Rendering Index	>80
Lumen Output	3125Lm / 3750Lm / 4375Lm / 5000Lm [Emergency 375Lm]
LED Efficacy	125 Lm/cW
Power Factor	0.92
Dimmable	On Request
IP Rating	IP66
IK Rating	IK08
Colour Temperature	3000K / 4000K / 5000K
Beam Spread	120°
Housing Material	ABS Plastic
Diffuser Material	Polycarbonate (Opal)
Operating Temperature	-20 to +40 °C
Input Voltage	AC200-240V, 50/60Hz
Dimensions	1190mm x 95mm x 75mm
Weight	1.26kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
Emergency Output	3 Hours [3W]
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

\* Warranty terms and conditions apply

**Information is subject to change and can be withdrawn without notice**

For further information on our products or terms and conditions visit our website [www.qvis.co.uk/lighting](http://www.qvis.co.uk/lighting) or email: [sales@qvislighting.com](mailto:sales@qvislighting.com)