

AQUAPACK MULTI-POWER VAPOUR PROOF



LIGHTING & SECURITY

AQUA-WS-1200TC/MS/EM




OSRAM

Driver as Standard


EPISTAR

LED's inside

TECHNICAL DRAWINGS

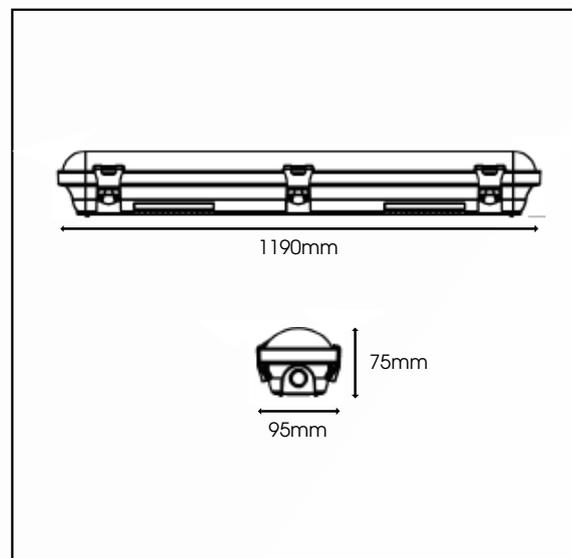

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

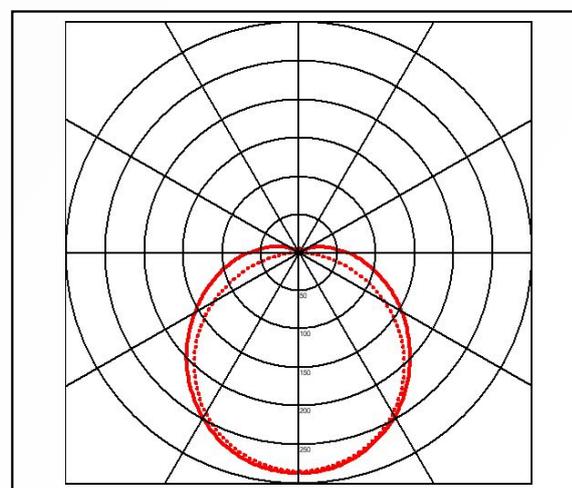

Specification	AquaPack
System Power	25W/30W/35W/40W (Emergency 3W)
LED Chipset	Epistar
Driver Manufacturer	Osram
Colour Rendering Index	>80
Lumen Output	3125lm/3750lm/4375lm/5000lm (Emergency 375lm)
LED Efficacy	125 Lm/cW
Dimmable	Microwave Sensor
Power Factor	0.92
IP Rating	IP66
IK Rating	IK08
Beam Spread	120 °
Colour Temperature	3000K/4000K/5000K
Housing Material	ABS plastic
Diffuser Type	Polycarbonate Opal
Input Voltage	AC 200-240V 50/60 Hz
Operating Temperature	-20 to 40 °C
Dimensions	1190mm x 95mm x 75mm
Weight	1.26kg
MacAdam Step	<3
Emergency Output	3 Hours (3W)
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

*For emergency products with a rated service life of < 50,000 operating hours, QVIS offers a 5-year warranty period on the luminaire and 1-year warranty period on the battery pack

For further information on our products or terms and conditions visit our website www.qvisled.com or email: sales@qvislighting.com

INDUSTRIAL RANGE