


AquaPack Tri-Colour & Multi-Power


Industrial Range

CODE: AQUA-WS-1500TC

QVIS[®]
LED LIGHTING

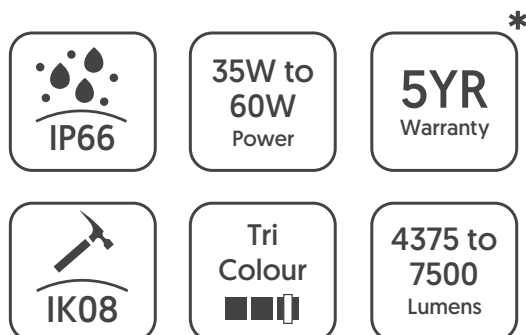


TECHNICAL DRAWINGS



A = 95mm C = 1490mm
B = 75mm

LUMINOUS INTENSITY DISTRIBUTION

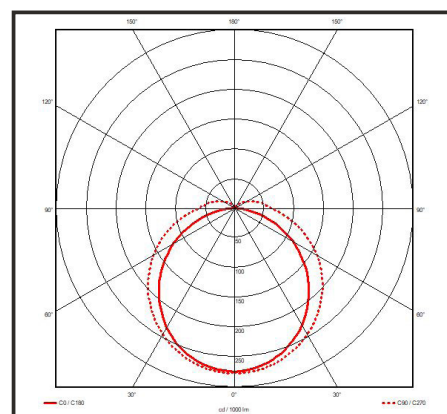

Specification	AquaPack
System Power [Selectable]	35W / 40W / 50W / 60W
Driver Manufacturer	Osram
LED Chipset	Epistar
Colour Rendering Index	>80
Lumen Output	4375Lm / 5000Lm / 6250Lm / 7500Lm
LED Efficacy	125 Lm/cW
Power Factor	0.92
Dimmable	On Request
IP Rating	IP66
IK Rating	IK08
Colour Temperature	3000K / 4000K / 5000K
Beam Spread	120°
Housing Material	ABS Plastic
Diffuser Material	Polycarbonate [Opal]
Operating Temperature	-20 to +40 °C
Input Voltage	AC200-240V, 50/60Hz
Dimensions	1490mm x 95mm x 75mm
Weight	1.55kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com