

AquaPack Tri-Colour & Multi-Power

Industrial Range

CODE: AQUA-WS-1500TC/EM

QVIS[®]
LED LIGHTING



3HR
Emergency
3W Battery

IP66

**35W to
60W**
Power

5YR
Warranty


IK08

**Tri
Colour**

**4375 to
7500**
Lumens

*

TECHNICAL DRAWINGS




A = 95mm C = 1490mm
B = 75mm

Specification	AquaPack
System Power [Selectable]	35W / 40W / 50W / 60W [Emergency 3W]
Driver Manufacturer	Osram
LED Chipset	Epistar
Colour Rendering Index	>80
Lumen Output	4375Lm / 5000Lm / 6250Lm / 7500Lm [Emergency 375Lm]
LED Efficacy	125 Lm/cW
Power Factor	0.92
Dimmable	On Request
IP Rating	IP66
IK Rating	IK08
Colour Temperature	3000K / 4000K / 5000K
Beam Spread	120°
Housing Material	ABS Plastic
Diffuser Material	Polycarbonate (Opal)
Operating Temperature	-20 to +40 °C
Input Voltage	AC200-240V, 50/60Hz
Dimensions	1490mm x 95mm x 75mm
Weight	1.55kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
Emergency Output	3 Hours [3W]
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

LUMINOUS INTENSITY DISTRIBUTION

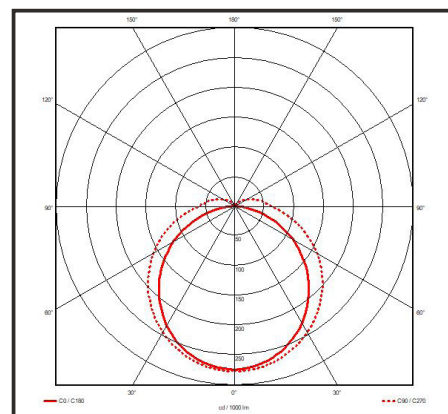

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com