






# AQUAPACK MULTI-POWER VAPOUR PROOF

AQUA-WS-1500TC/MS/EM

**QVIS**<sup>®</sup>

LIGHTING & SECURITY



**OSRAM**

Driver as Standard

**EPISTAR**


LED's inside

Specification	AquaPack
System Power	35W/40W/50W/60W (Emergency 3W)
LED Chipset	Epistar
Driver Manufacturer	Osram
Colour Rendering Index	>80
Lumen Output	4375lm/5000lm/6250lm/7500lm (Emergency 375lm)
LED Efficacy	125 Lm/cW
Dimmable	Microwave Sensor
Power Factor	0.92
IP Rating	IP66
IK Rating	IK08
Beam Spread	120 °
Colour Temperature	3000K/4000K/5000K
Housing Material	ABS plastic
Diffuser Type	Polycarbonate Opal
Input Voltage	AC 200-240V 50/60 Hz
Operating Temperature	-20 to 40 °C
Dimensions	1490mm x 95mm x 75mm
Weight	1.55kg
MacAdam Step	<3
Emergency Output	3 Hours (3W)
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS


\* Warranty terms and conditions apply

\*For emergency products with a rated service life of < 50,000 operating hours, QVIS offers a 5-year warranty period on the luminaire and 1-year warranty period on the battery pack

## TECHNICAL DRAWINGS

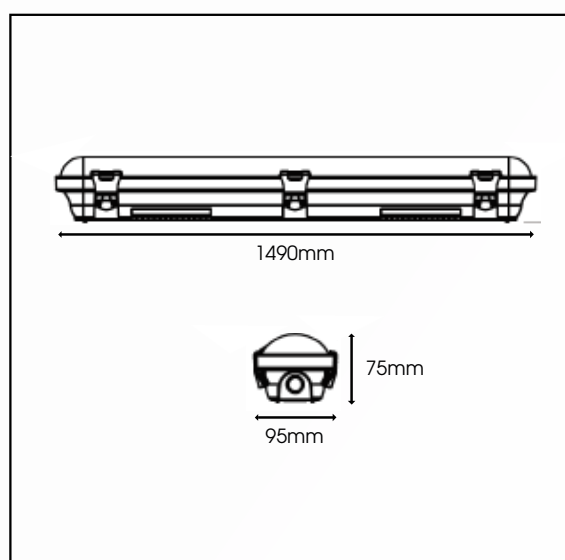

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

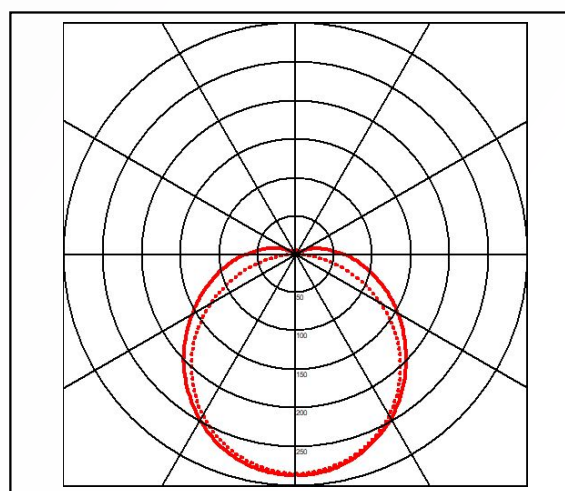

INDUSTRIAL RANGE