

# AquaPack Tri-Colour & Multi-Power


## Industrial Range

CODE: AQUA-WS-1800TC

**QVIS**<sup>®</sup>  
LED LIGHTING



### TECHNICAL DRAWINGS




A = 125mm    C = 1800mm  
B = 92mm

Specification	AquaPack
System Power [Selectable]	45W / 50W / 65W / 75W
Driver Manufacturer	Osram
LED Chipset	Epistar
Colour Rendering Index	>80
Lumen Output	5625Lm / 6250Lm / 8125Lm / 9375Lm
LED Efficacy	125 Lm/cW
Power Factor	0.92
Dimmable	On Request
IP Rating	IP66
IK Rating	IK08
Colour Temperature	3000K / 4000K / 5000K
Beam Spread	120°
Housing Material	ABS Plastic
Diffuser Material	Polycarbonate [Opal]
Operating Temperature	-20 to +40 °C
Input Voltage	AC200-240V, 50/60Hz
Dimensions	1800mm x 125mm x 92mm
Weight	3kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

\* Warranty terms and conditions apply

### LUMINOUS INTENSITY DISTRIBUTION

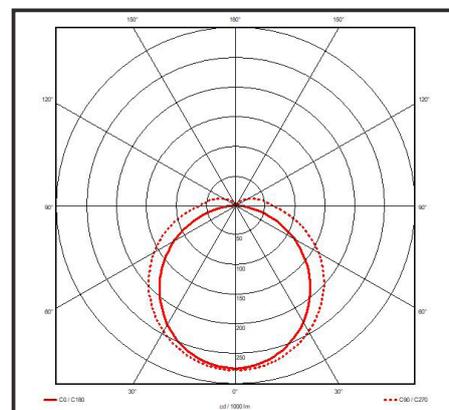

**Information is subject to change and can be withdrawn without notice**

For further information on our products or terms and conditions visit our website [www.qvis.co.uk/lighting](http://www.qvis.co.uk/lighting) or email: [sales@qvislighting.com](mailto:sales@qvislighting.com)