

AquaPack Tri-Colour & Multi-Power

Industrial Range

CODE: AQUA-WS-1800TC/EM

QVIS[®]
LED LIGHTING



3HR
Emergency
3W Battery

IP66

**45W to
75W**
Power


5YR
Warranty

IK08

**Tri
Colour**

**5625 to
9375**
Lumens

TECHNICAL DRAWINGS




A = 125mm C = 1800mm
B = 92mm

Specification	AquaPack
System Power [Selectable]	45W / 50W / 65W / 75W [Emergency 3W]
Driver Manufacturer	Osram
LED Chipset	Epistar
Colour Rendering Index	>80
Lumen Output	5625Lm / 6250Lm / 8125Lm / 9375Lm [Emergency 375Lm]
LED Efficacy	125 Lm/cW
Power Factor	0.92
Dimmable	On Request
IP Rating	IP66
IK Rating	IK08
Colour Temperature	3000K / 4000K / 5000K
Beam Spread	120°
Housing Material	ABS Plastic
Diffuser Material	Polycarbonate (Opal)
Operating Temperature	-20 to +40 °C
Input Voltage	AC200-240V, 50/60Hz
Dimensions	1800mm x 125mm x 92mm
Weight	3kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
Emergency Output	3 Hours [3W]
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

LUMINOUS INTENSITY DISTRIBUTION

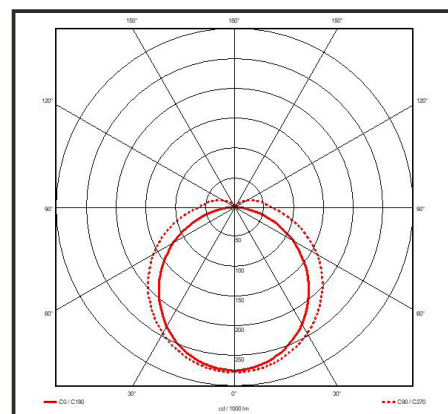

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com