


Baylite Sport Low Bay


Industrial Range

CODE: BAY-W-150NW

QVIS[®]
LED LIGHTING

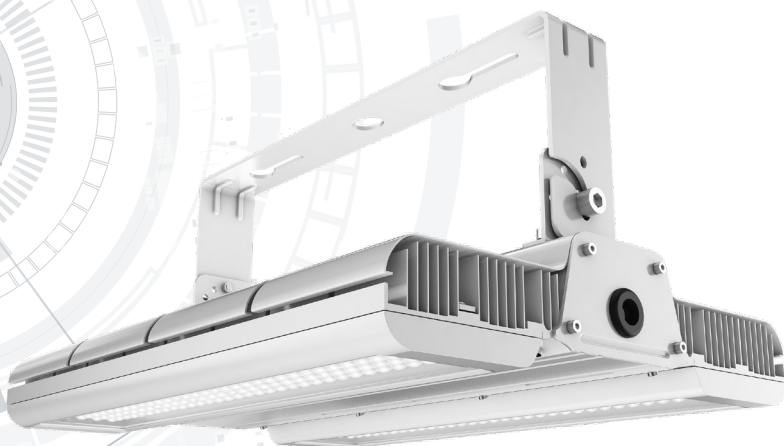


TECHNICAL DRAWINGS

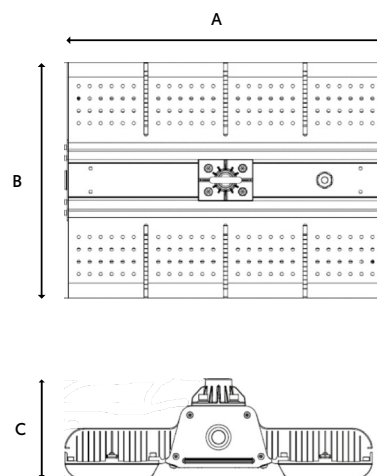

A = 464mm C = 110mm
B = 344mm

LUMINOUS INTENSITY DISTRIBUTION

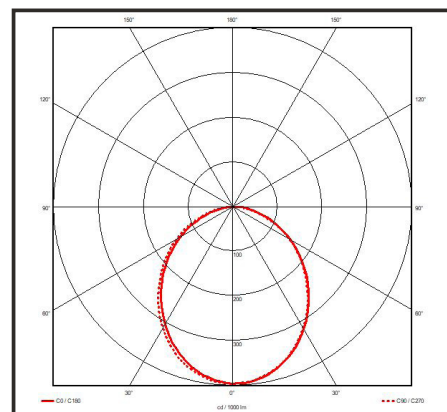

Specification	Baylite
System Power	150W
Driver Manufacturer	Mean Well
LED Chipset	Nichia
Colour Rendering Index	>85
Lumen Output	18600Lm
LED Efficacy	124 Lm/cW
Power Factor	>0.9
Dimmable	On Request
IP Rating	IP65
IK Rating	IK10
Colour Temperature	4000K
Beam Spread	90°
Housing Material	Aluminium
Diffuser Material	Polycarbonate
Operating Temperature	-30 to +55 °C
Input Voltage	AC200-240V
Dimensions	464mm x 344mm x 110mm
Weight	8.68kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com