

Glow UFO High Bay



Industrial Range

CODE: GLOWUFO-150CW

QVIS®
LED LIGHTING



TECHNICAL DRAWINGS




A = 150mm C = 260mm
B = 165mm

Specification	Glow UFO
System Power	150W
Driver Manufacturer	Lifud
LED Chipset	Samsung
Colour Rendering Index	>85
Lumen Output	21000Lm
LED Efficacy	140 Lm/cW
Power Factor	>0.9
Dimmable	1-10V
IP Rating	IP65
IK Rating	IK08
Colour Temperature	6000K
Beam Spread	120°
Housing Material	Aluminium
Diffuser Material	Tempered Glass
Operating Temperature	-20 to +50°C
Input Voltage	AC200-240V, 47-63Hz
Dimensions	260mm x 165mm
Weight	3.8kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
CE Standards	EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

LUMINOUS INTENSITY DISTRIBUTION

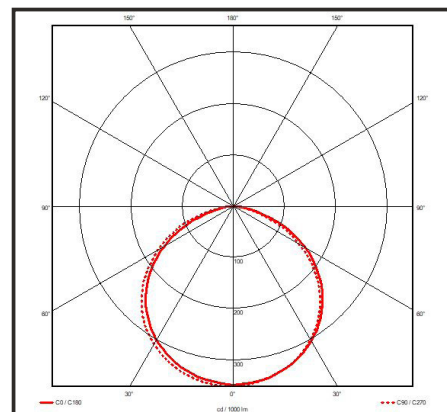

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com