

Glow UFO High Bay


Industrial Range

CODE: GLOWUFO-150NW/EM

QVIS[®]
LED LIGHTING




TECHNICAL DRAWINGS

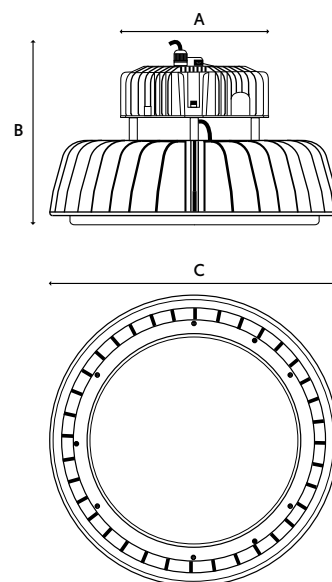

A = 150mm C = 260mm
B = 165mm

LUMINOUS INTENSITY DISTRIBUTION

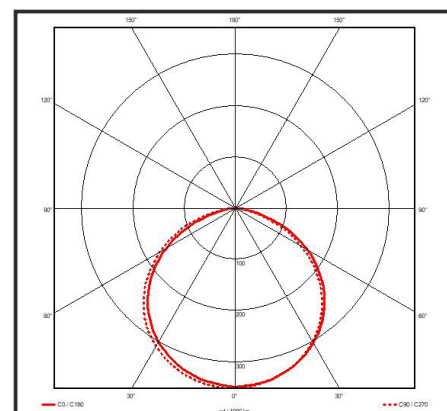

Specification	Glow UFO
System Power	150W [Emergency 5W]
Driver Manufacturer	Lifud
LED Chipset	Samsung
Colour Rendering Index	>85
Lumen Output	21000Lm [Emergency 700Lm]
LED Efficacy	140 Lm/cW
Power Factor	>0.9
Dimmable	1-10V
IP Rating	IP65
IK Rating	IK08
Colour Temperature	4000K
Beam Spread	120°
Housing Material	Aluminium
Diffuser Material	Tempered Glass
Operating Temperature	-20 to +50°C
Input Voltage	AC200-240V, 47-63Hz
Dimensions	260mm x 165mm
Weight	4.4kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
Emergency Output	3 Hours [5W]
CE Standards	EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com