


GLOW UFO MAX HIGHBAY

GLOWUFO-M180-100NW/EM

QVIS®

LIGHTING & SECURITY




Driver as Standard




LED's inside

TECHNICAL DRAWINGS

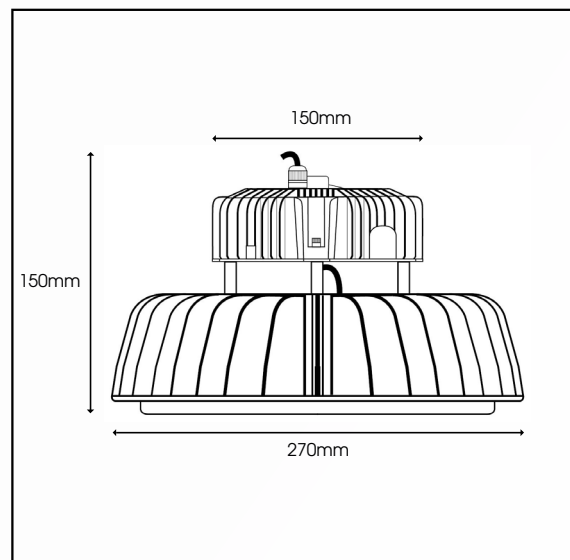

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

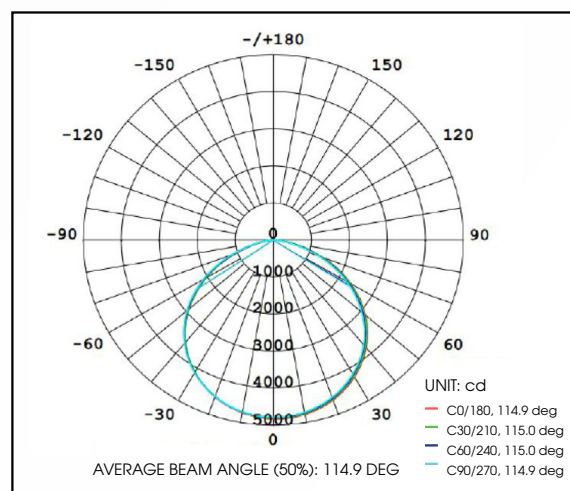

Specification	UFO MAX Highbay
System Power	100W (Emergency 5W)
LED Chipset	Samsung
Driver Manufacturer	Mean Well
Colour Rendering Index	>80
Lumen Output	18000Lm (Emergency 900Lm)
LED Efficacy	180 Lm/cW
Power Factor	>0.9
IP Rating	IP65
IK Rating	IK10
Beam Spread	120 °
Colour Temperature	4000K
Housing Material	Aluminium
Diffuser Type	Polycarbonate
Operating Temperature	-20 to 50 °C
Input Voltage	AC200-240V, 47-63H
Weight	3.5kg (Net), 4.2kg (Gross)
Dimensions	ø270mm x150mm
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
Emergency Output	3 Hours (5W)*
CE Standards	EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

*For emergency products with a rated service life of < 50.000 operating hours, QVIS offers a 5-year warranty period on the luminaire and 1-year warranty period on the battery pack

INDUSTRIAL RANGE