


GLOW UFO MAX HIGHBAY

GLOWUFO-M180-200CW

QVIS®

LIGHTING & SECURITY




Driver as Standard




LED's inside

TECHNICAL DRAWINGS

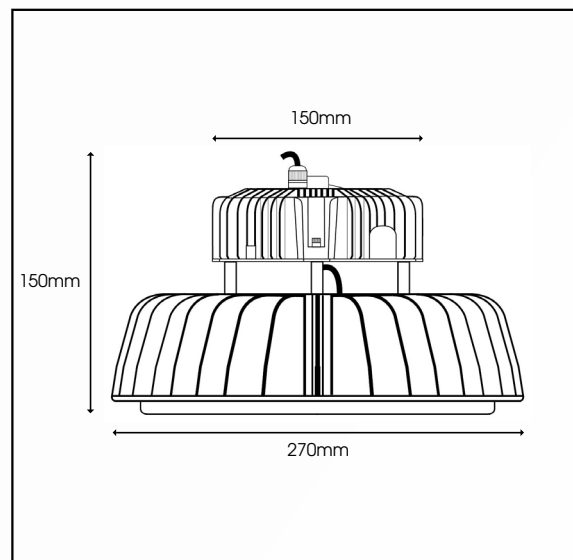

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

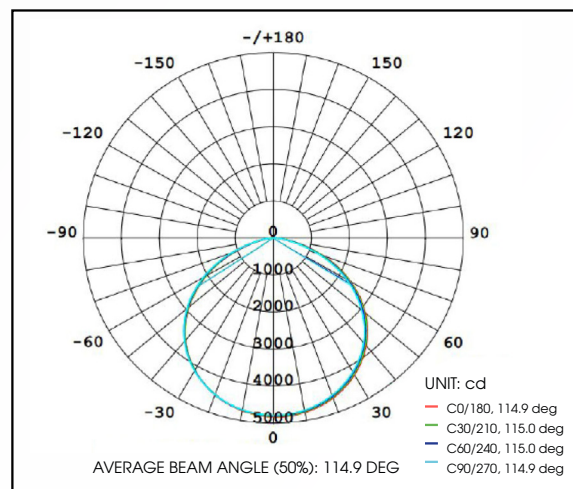

Specification	UFO MAX Highbay
System Power	200W
LED Chipset	Samsung
Driver Manufacturer	Mean Well
Colour Rendering Index	>80
Lumen Output	36000Lm
LED Efficacy	180 Lm/cW
Power Factor	>0.9
IP Rating	IP65
IK Rating	IK10
Beam Spread	120 °
Colour Temperature	6000K
Housing Material	Aluminium
Diffuser Type	Polycarbonate
Operating Temperature	-20 to 50 °C
Input Voltage	AC200-240V, 47-63H
Weight	4.6kg (Net), 5.3kg (Gross)
Dimensions	ø270mm x150mm
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply