

Glowbay Linear Low Bay


Industrial Range

CODE: GLOWBAY-100NW/EM

QVIS[®]
LED LIGHTING




TECHNICAL DRAWINGS

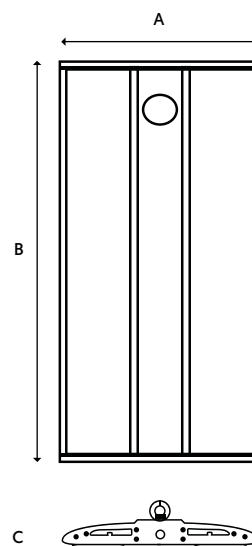

A = 426mm C = 113.6mm
B = 924mm

LUMINOUS INTENSITY DISTRIBUTION

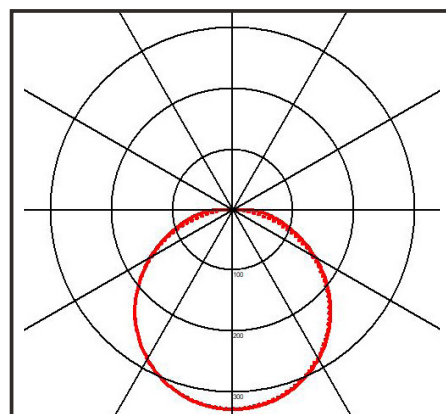

Specification	Glowbay
System Power	100W [Emergency 5W]
Driver Manufacturer	Sosen
LED Chipset	Samsung
Colour Rendering Index	>80
Lumen Output	14000Lm [Emergency 420Lm]
LED Efficacy	140 Lm/cW
Power Factor	>0.95
Dimmable	0-10V
IP Rating	IP65
IK Rating	IK10
Colour Temperature	4000K
Beam Spread	125°
Housing Material	Aluminium
Diffuser Material	Frosted Polycarbonate
Operating Temperature	-40 to +45 °C
Input Voltage	AC100-240V
Dimensions	924mm x 426mm x 113.6mm
Weight	8.6kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
Emergency Output	3 Hours [3W]
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com