


Glowbay Linear Low Bay



Industrial Range

CODE: GLOWBAY-200NW

QVIS[®]
LED LIGHTING



TECHNICAL DRAWINGS

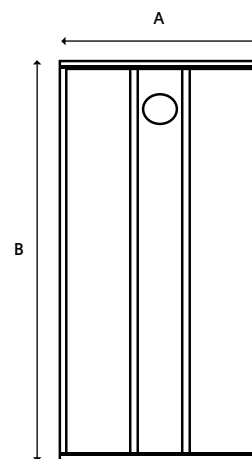


A = 426mm C = 113.6mm
B = 924mm

Specification	Glowbay
System Power	200W
Driver Manufacturer	Sosen
LED Chipset	Samsung
Colour Rendering Index	>80
Lumen Output	28000Lm
LED Efficacy	140 Lm/cW
Power Factor	>0.95
Dimmable	0-10V
IP Rating	IP65
IK Rating	IK10
Colour Temperature	4000K
Beam Spread	125°
Housing Material	Aluminium
Diffuser Material	Frosted Polycarbonate
Operating Temperature	-40 to +45 °C
Input Voltage	AC100-240V
Dimensions	924mm x 426mm x 113.6mm
Weight	8.6kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

LUMINOUS INTENSITY DISTRIBUTION

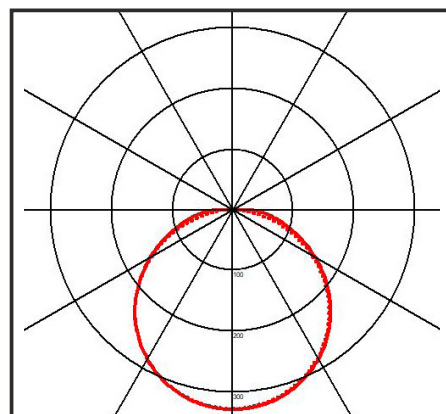

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com