

GLOWBRITE HIGHBAY

GLOWBRITE150NW

QVIS®

LIGHTING & SECURITY



hoods available separately



16950
LUMENS

150W
POWER

6YR
WARRANTY
2YR
ON-SITE




Driver as Standard




LED's inside

TECHNICAL DRAWINGS

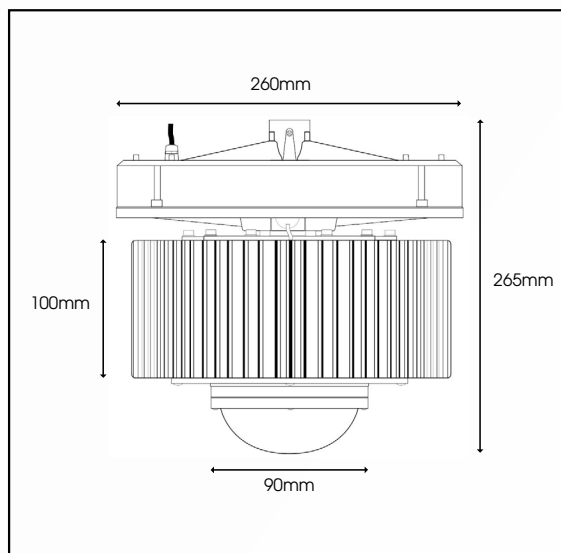

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

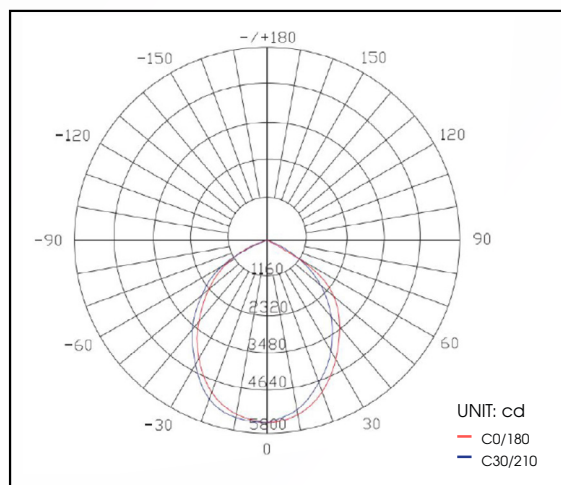

Specification	Glowbrite High Bay
System Power	150W
LED Chipset	Cree
Driver Manufacturer	Mean Well
Colour Rendering Index	>80
Dimmable	Contact Office
Lumen Output	16950Lm
LED Efficacy	113 Lm/cW
Power Factor	0.95
IP Rating	IP65
Beam Spread	80 ° or 120 °
Colour Temperature	4000K
Housing Material	Aluminium
Diffuser Type	Polycarbonate or Aluminium
Operating Temperature	-25 to 55 °C
Input Voltage	200-240VAC
Weight	6kg
Dimensions	260mm x 265mm
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply