

# NCF Robust Vapour Proof Linear

## Industrial Range

CODE: NCF2-55-1500CW/EM

**QVIS**<sup>®</sup>  
LED LIGHTING

**3HR**  
Emergency  
3W Battery


**55W**  
Power

**7YR**  
Warranty\*

**IP65**


**6600**  
Lumens

### TECHNICAL DRAWINGS



A = 110mm    C = 1550mm  
B = 73mm

### LUMINOUS INTENSITY DISTRIBUTION

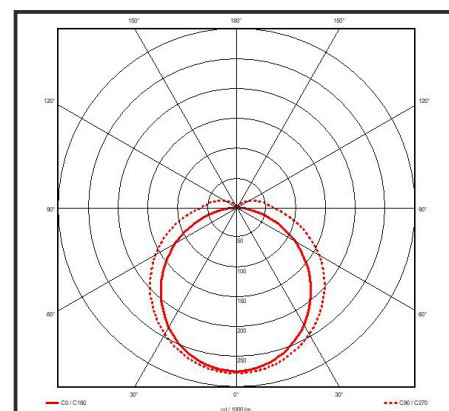

Specification	NCF
System Power	55W [Emergency 3W]
Driver Manufacturer	Tridonic
LED Chipset	Samsung
Colour Rendering Index	>85
Lumen Output	6600Lm [Emergency 360Lm]
LED Efficacy	120 Lm/cW
Power Factor	0.958
Dimmable	On Request
IP Rating	IP65
Colour Temperature	6000K
Beam Spread	120°
Housing Material	Polycarbonate
Diffuser Material	Polycarbonate
Operating Temperature	-20 to +65 °C
Input Voltage	AC200-240V, 47-63Hz
Dimensions	1550mm x 110mm x 73mm
Weight	3kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
Emergency Output	3 Hours [3W]
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

\* Warranty terms and conditions apply

**Information is subject to change and can be withdrawn without notice**

For further information on our products or terms and conditions visit our website [www.qvis.co.uk/lighting](http://www.qvis.co.uk/lighting) or email: [sales@qvislighting.com](mailto:sales@qvislighting.com)