
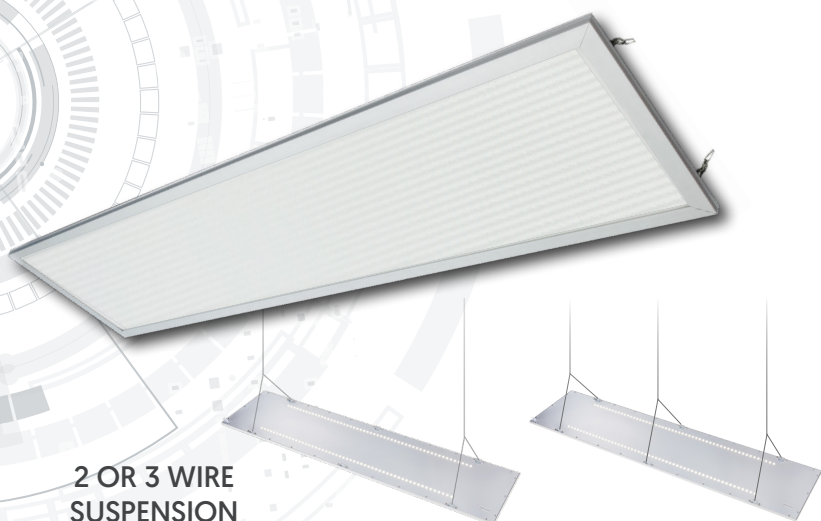



Ambience Direct/Indirect (12x3)

Modular & Recessed Range

CODE: AMB-MP-30-12X3NW

QVIS[®]
LED LIGHTING




2 OR 3 WIRE
SUSPENSION


| Specification | Ambience |
|------------------------|-------------------------------------------------------------------------------------------------------------------------|
| System Power | 30W |
| Driver Manufacturer | Tridonic |
| LED Chipset | Samsung |
| Colour Rendering Index | >80 |
| Typical UGR | <17 |
| Lumen Output | 750Lm ↑ / 3000Lm ↓ |
| LED Efficacy | 125 Lm/cW |
| Power Factor | >0.9 |
| IP Rating | IP40 |
| Diffuser | Microprism |
| Dimmable | On Request |
| Beam Spread | 120° |
| Colour Temperature | 4000K |
| Housing Material | Aluminium |
| Operating Temperature | -20 to +45 °C |
| Input Voltage | AC200-240V, 50/60Hz |
| Dimensions | 1195mm x 295mm x 11mm |
| Weight | 3.5kg |
| MacAdam Step | <3 |
| Lifetime | 50,000 hours, L70-B10 (Ta 25 °C) |
| CE Standards | EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3- 3, EN62722-1, EN62722-2-1 and EN50581 |
| CE Directives | LVD, EMC, ERP & RoHS |

* Warranty terms and conditions apply

TECHNICAL DRAWINGS

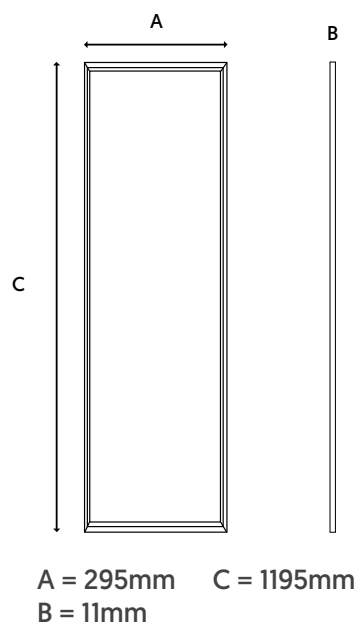

LUMINOUS INTENSITY DISTRIBUTION

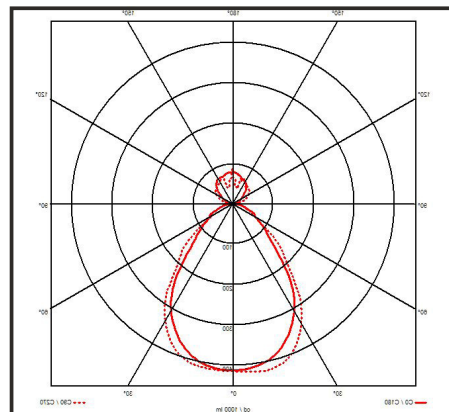

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com