



Ambience Direct/Indirect (12x3)


Modular & Recessed Range

CODE: AMB-MP-30-12X3NW/OD

QVIS[®]
LED LIGHTING



*

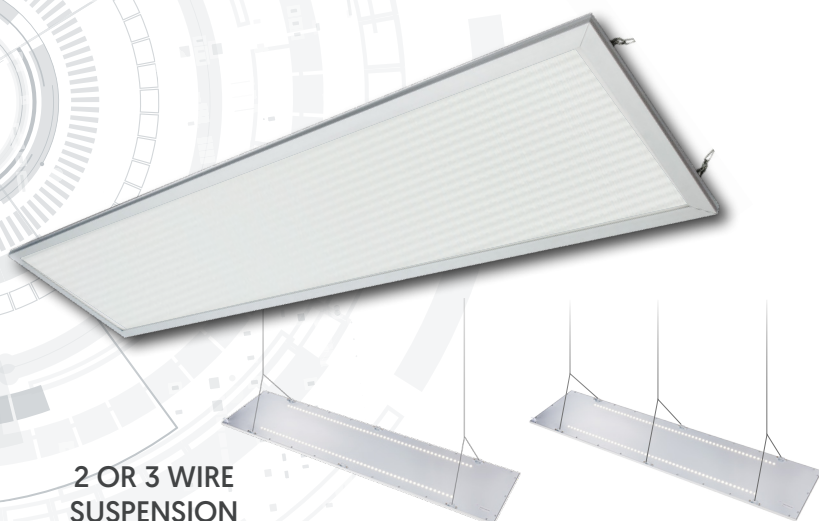


2 OR 3 WIRE
SUSPENSION


Specification	Ambience
System Power	30W
Driver Manufacturer	Osram
LED Chipset	Samsung
Colour Rendering Index	>80
Typical UGR	<17
Lumen Output	750Lm ↑ / 3000Lm ↓
LED Efficacy	125 Lm/cW
Power Factor	>0.9
IP Rating	IP40
Diffuser	Microprism
Dimmable	DALI / Touch-Dim / Corridor
Beam Spread	120°
Colour Temperature	4000K
Housing Material	Aluminium
Operating Temperature	-20 to +45 °C
Input Voltage	AC200-240V, 50/60Hz
Dimensions	1195mm x 295mm x 11mm
Weight	3.5kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

TECHNICAL DRAWINGS

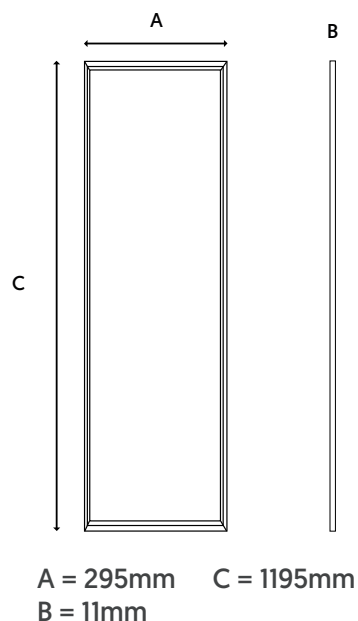

LUMINOUS INTENSITY DISTRIBUTION

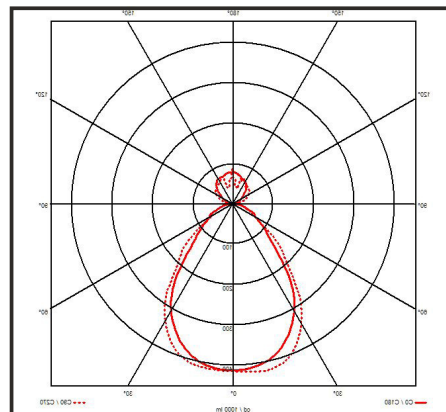

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com