

Ambience Direct/Indirect (12x3)

Modular & Recessed Range

CODE: AMB-MP-30-12X3NW/TE

QVIS[®]
LED LIGHTING

3HR
Emergency
3W Battery

IP40

30W
Power

7YR
Warranty

Direct/
Indirect
↑↓

MPS
Diffuser

3750
Lumens

DALI 2



Switch Dim

10%


Corridor

DSI


2 OR 3 WIRE
SUSPENSION

Specification	Ambience
System Power	30W [Emergency 3W]
Driver Manufacturer	Tridonic
LED Chipset	Samsung
Colour Rendering Index	>80
Typical UGR	<17
Lumen Output	750Lm ↑ / 3000Lm ↓ [Emergency 375Lm]
LED Efficacy	125 Lm/cW
Power Factor	>0.9
IP Rating	IP40
Diffuser	Microprism
Dimmable	DALI / Switch-Dim / Corridor / DSI
Beam Spread	120°
Colour Temperature	4000K
Housing Material	Aluminium
Operating Temperature	-20 to +45 °C
Input Voltage	AC200-240V, 50/60Hz
Dimensions	1195mm x 295mm x 11mm
Weight	3.5kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
Emergency Output	3 Hours [3W]
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3- 3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

TECHNICAL DRAWINGS

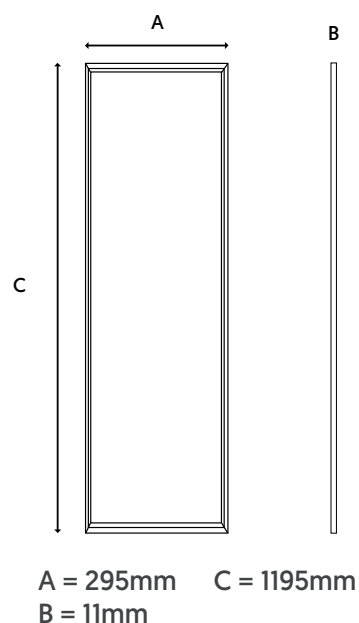

LUMINOUS INTENSITY DISTRIBUTION

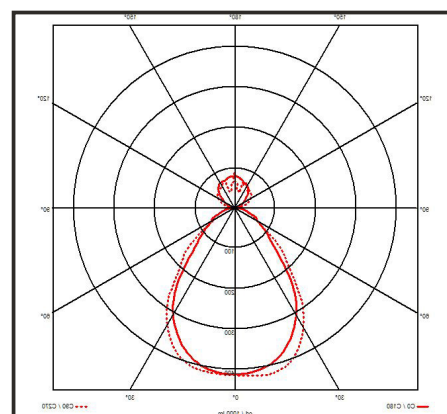

* Warranty terms and conditions apply

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com