

Boreal Tuneable White Panel (6x6)

Modular & Recessed Range

CODE: BOR-38-6X6TW

QVIS[®]
LED LIGHTING



38W
Power


7YR
Warranty*

MPS
Diffuser


4560
Lumens

2700K


6500K



TUNEABLE WHITE TECHNOLOGY

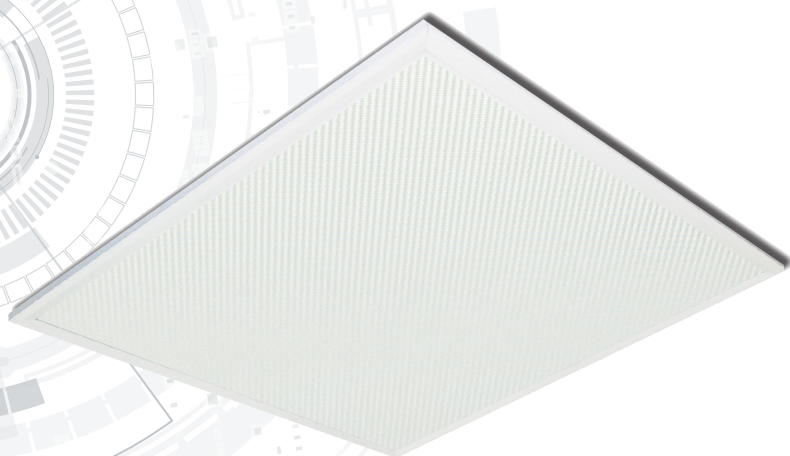

TECHNICAL DRAWINGS

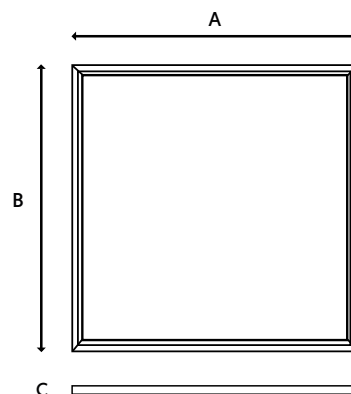


A = 595mm C = 10.5mm
B = 595mm

Specification	Boreal
System Power	38W
Driver Manufacturer	Tridonic (DT8 or BDW)
LED Chipset	Samsung
Colour Rendering Index	>85
Typical UGR	<19
Lumen Output	4560Lm
LED Efficacy	120 Lm/cW
Power Factor	>0.9
IP Rating	IP44 from below
Diffuser	Microprism
Dimmable	On Request
Beam Spread	160°
Colour Temperature	2700K to 6500K
Operating Temperature	-20 to +50 °C
Input Voltage	AC200-240V
Dimensions	595mm x 595mm x 10.5mm
Weight	2.6kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

LUMINOUS INTENSITY DISTRIBUTION

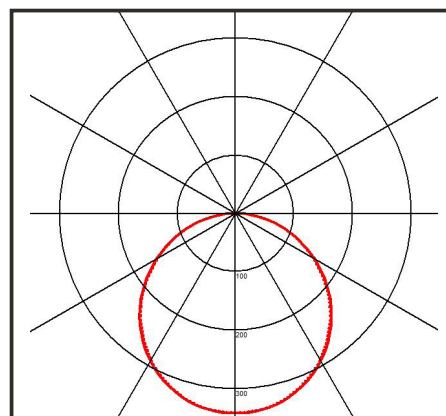

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com