

# Lynx Modular Panel (6x6)

Modular & Recessed Range

CODE: LYNX-ADV-25-6X6WW

**QVIS**<sup>®</sup>  
LED LIGHTING



**25W**  
Power

**7YR**  
Warranty



**OPAL**  
Diffuser


**3375**  
Lumens



| Specification          | Lynx   |
|------------------------|--|
| System Power           | 25W  |
| Driver Manufacturer    | Osram  |
| LED Chipset            | Samsung  |
| Colour Rendering Index | >85  |
| Typical UGR            | <19  |
| Lumen Output           | 3375Lm   |
| LED Efficacy           | 135 Lm/cW  |
| Power Factor           | 0.95   |
| IP Rating              | IP44 from Below  |
| Diffuser               | Opal   |
| Dimmable               | On Request   |
| Beam Spread            | 160°   |
| Colour Temperature     | 3000K  |
| Housing Material       | High Grade 6063 Aluminium Frame  |
| Light Guide Plate      | PMMA   |
| Operating Temperature  | -20 to +65 °C  |
| Input Voltage          | AC200-240V, 47-63Hz  |
| Dimensions             | 595mm x 595mm x 10.5mm   |
| Weight                 | 2.5kg  |
| MacAdam Step           | <3   |
| Lifetime               | 50,000 hours, L70-B10<br>(Ta 25 °C)  |
| CE Standards           | EN60598-1, EN 60598 2-2, EN62493,<br>EN55015, EN61547, EN61000-3-2, EN61000-3-3,<br>EN62722-1, EN62722-2-1 and EN50581 |
| CE Directives          | LVD, EMC, ERP & RoHS   |


\* Warranty terms and conditions apply

## TECHNICAL DRAWINGS

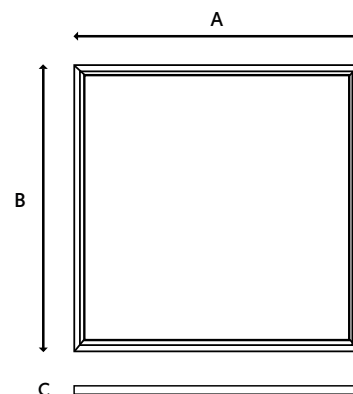

A = 595mm    C = 10.5mm  
B = 595mm

## LUMINOUS INTENSITY DISTRIBUTION

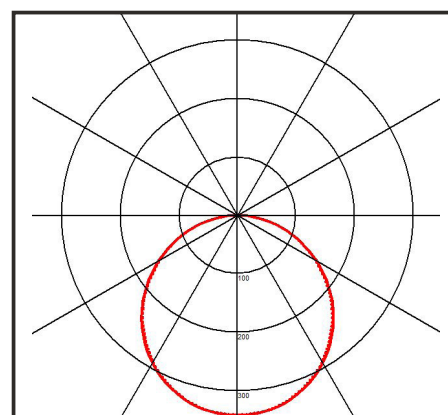

**Information is subject to change and can be withdrawn without notice**

For further information on our products or terms and conditions visit our website [www.qvis.co.uk/lighting](http://www.qvis.co.uk/lighting) or email: [sales@qvislighting.com](mailto:sales@qvislighting.com)