

Serene Architectural Panel (6x6)

Modular & Recessed Range

CODE: SER-35-6X6NW/EM

QVIS[®]
LED LIGHTING

3HR
Emergency
3W Battery



35W
Power

7YR
Warranty




MPS
Diffuser

3675
Lumens


Specification	Serene
System Power	35W [Emergency 3W]
Driver Manufacturer	Tridonic
LED Chipset	Samsung
Colour Rendering Index	>85
Typical UGR	<19
Lumen Output	3675Lm [Emergency 315Lm]
LED Efficacy	105 Lm/cW
Power Factor	>0.9
IP Rating	IP44 from below
Fire Rating	TP[a]
Diffuser	Microprism
Dimmable	On Request
Beam Spread	90°
Colour Temperature	4000K
Frame Material	Anodised Aluminium
Operating Temperature	-20 to +40 °C
Input Voltage	AC220-240V
Dimensions	595mm x 595mm x 30mm
Weight	2.8kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
Emergency Output	3 Hours [3W]
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

TECHNICAL DRAWINGS

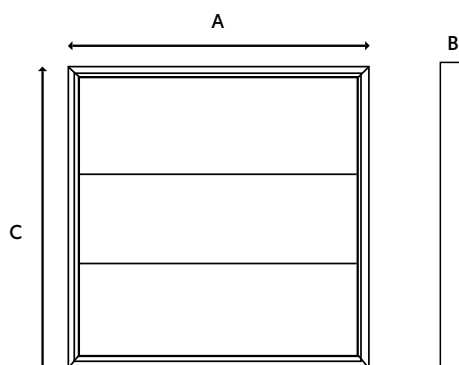

A = 595mm C = 595mm
B = 30mm

LUMINOUS INTENSITY DISTRIBUTION

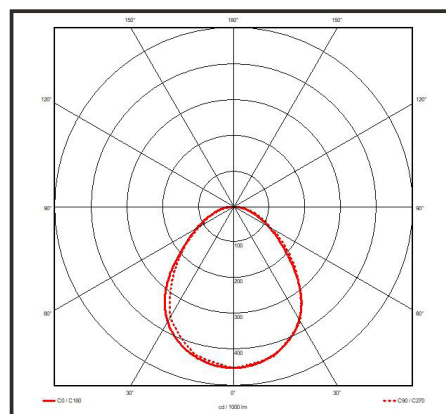

* Warranty terms and conditions apply

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com