


# Scorch All-In-One Fixed Fire Rated



## Downlight Range

CODE: SFR-10-TC

**QVIS**<sup>®</sup>  
LED LIGHTING

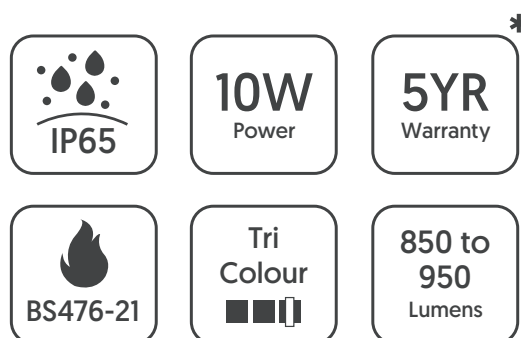

## TECHNICAL DRAWINGS




A = 82.09mm B = 60.57mm

Specification	Scorch
System Power	10W
Driver Manufacturer	Q-Drive
LED Chipset	Epistar
Colour Rendering Index	>80
Lumen Output	850Lm [3000K / 6000K], 950Lm [4000K]
LED Efficacy	85 Lm/cW [3000K / 6000K], 95Lm/cW [4000K]
Power Factor	>0.9
IP Rating	IP65 from fascia
Fire Rating	BS476-21 [30/60/90 Minute]
Dimmable	Trailing Edge [20 Fittings Max.]
Beam Spread	40°
Colour Temperature	3000K / 4000K / 6000K
Housing Material	Aluminium & Steel (Fascia)
Magnetic Bezels	White, Polished & Brushed Bezels In Box
LED Type	COB
Building Registrations	Part L
Input Voltage	AC230V, 50/60Hz
Cut Out Diameter	67mm
Dimensions	82.09mm x 60.57mm
Weight	0.34kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

\* Warranty terms and conditions apply

## LUMINOUS INTENSITY DISTRIBUTION

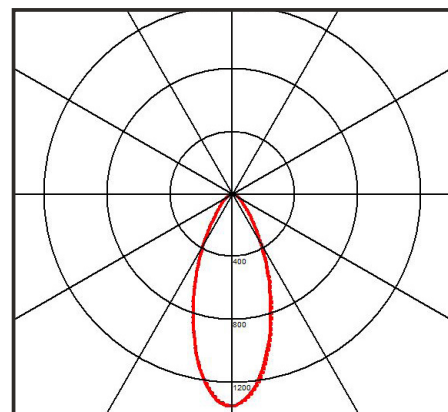

**Information is subject to change and can be withdrawn without notice**

For further information on our products or terms and conditions visit our website [www.qvis.co.uk/lighting](http://www.qvis.co.uk/lighting) or email: [sales@qvislighting.com](mailto:sales@qvislighting.com)