

Scorch All-In-One Fixed Fire Rated

Downlight Range

CODE: SFR-10-TC/EM

QVIS[®]
LED LIGHTING



3HR
Emergency
3W Battery

IP65

10W
Power

5YR
Warranty



BS476-21

**Tri
Colour**

**850 to
950
Lumens**


Specification	Scorch
System Power	10W [Emergency 3W]
Driver Manufacturer	Q-Drive
LED Chipset	Epistar
Colour Rendering Index	>80
Lumen Output	850Lm [3000K / 6000K], 950Lm [4000K] [Emergency 255Lm / 285Lm]
LED Efficacy	85 Lm/cW [3000K / 6000K], 95Lm/cW [4000K]
Power Factor	>0.9
IP Rating	IP65 from fascia
Fire Rating	BS476-21 [30/60/90 Minute]
Dimmable	Trailing Edge [20 Fittings Max.]
Beam Spread	40°
Colour Temperature	3000K / 4000K / 6000K
Housing Material	Aluminium & Steel [Fascia]
Magnetic Bezels	White, Polished & Brushed Bezels In Box
LED Type	COB
Building Registrations	Part L
Input Voltage	AC230V, 50/60Hz
Cut Out Diameter	67mm
Dimensions	82.09mm x 60.57mm
Weight	0.34kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
Emergency Output	3 Hours [3W]
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3- 3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

TECHNICAL DRAWINGS



A = 82.09mm B = 60.57mm

LUMINOUS INTENSITY DISTRIBUTION

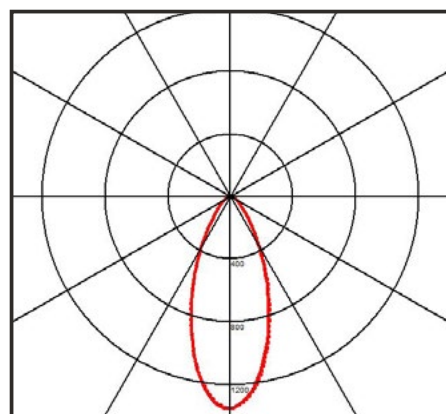

* Warranty terms and conditions apply