
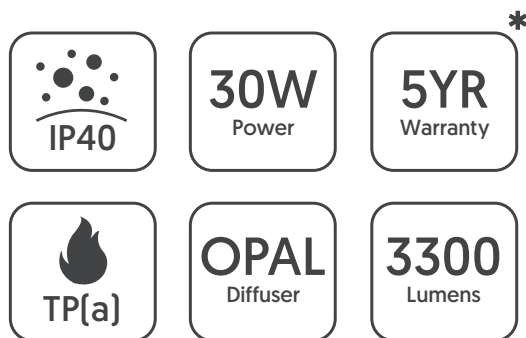


Phoenix Architectural Panel (6x6)

Modular & Recessed Range

CODE: PHO-30-6X6NW


QVIS[®]
LED LIGHTING

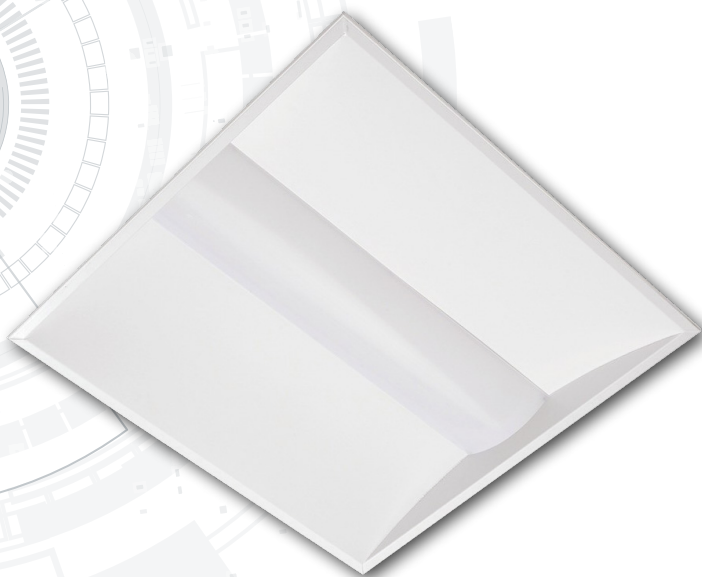

| Specification | Phoenix |
|------------------------|---|
| System Power | 30W |
| Driver Manufacturer | Tridonic |
| LED Chipset | Epistar |
| Colour Rendering Index | >85 |
| Typical UGR | <19 |
| Lumen Output | 3300Lm |
| LED Efficacy | 110 Lm/cW |
| Power Factor | >0.9 |
| IP Rating | IP40 |
| Diffuser | Opal |
| Dimmable | On Request |
| Beam Spread | 78° |
| Colour Temperature | 4000K |
| Housing Material | Polycarbonate |
| Operating Temperature | -20 to +45 °C |
| Input Voltage | AC220-240V, 50-60Hz |
| Dimensions | 595mm x 595mm x 55mm |
| Weight | 3kg |
| MacAdam Step | <3 |
| Lifetime | 50,000 hours, L70-B10 (Ta 25 °C) |
| CE Standards | EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3- 3, EN62722-1, EN62722-2-1 and EN50581 |
| CE Directives | LVD, EMC, ERP & RoHS |


* Warranty terms and conditions apply

TECHNICAL DRAWINGS

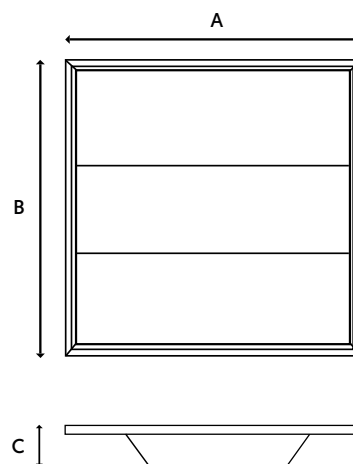

A = 595mm C = 55mm
B = 595mm

LUMINOUS INTENSITY DISTRIBUTION

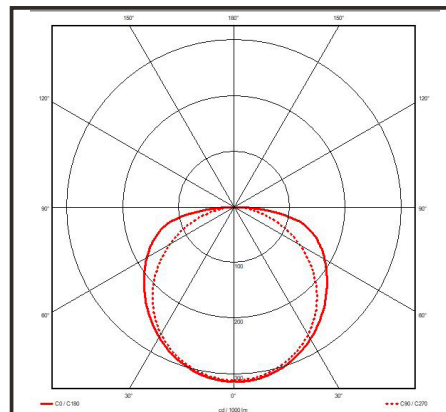

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com