


# Phoenix Architectural Panel (6x6)

Modular & Recessed Range

CODE: PHO-30-6X6NW/TE

**QVIS**<sup>®</sup>  
LED LIGHTING

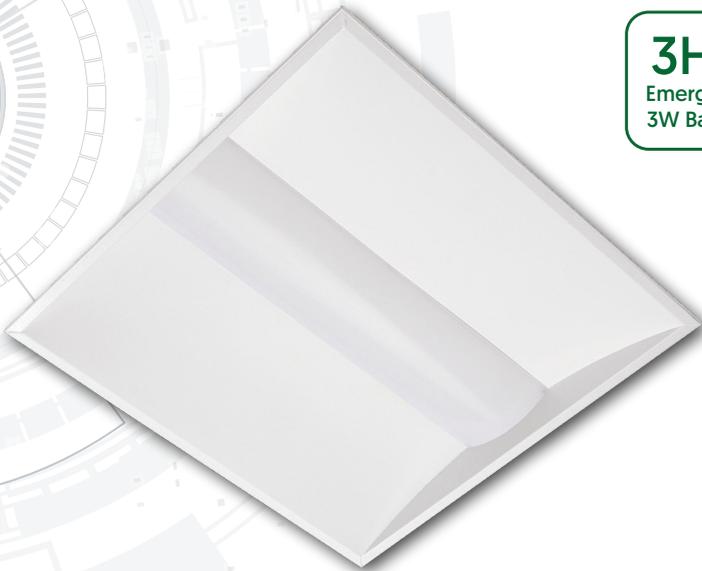

**3HR**  
Emergency  
3W Battery

**IP40**

**30W**  
Power

**5YR**  
Warranty\*

**TP(a)**

**OPAL**  
Diffuser

**3300**  
Lumens


**DALI 2**

Switch Dim

10%  
Corridor


**DSI**

## TECHNICAL DRAWINGS

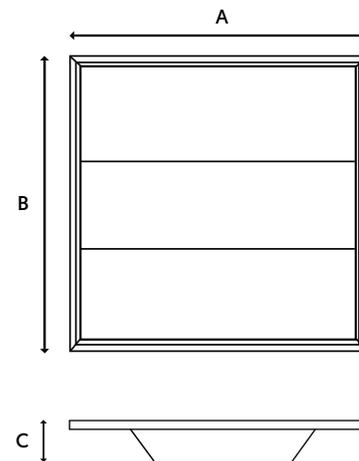

A = 595mm    C = 55mm  
B = 595mm

## LUMINOUS INTENSITY DISTRIBUTION

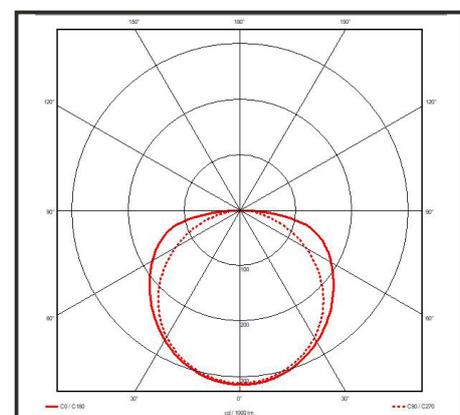

Specification	Phoenix
System Power	30W [Emergency 3W]
Driver Manufacturer	Tridonic
LED Chipset	Epistar
Colour Rendering Index	>85
Typical UGR	<19
Lumen Output	3300Lm [Emergency 330Lm]
LED Efficacy	110 Lm/cW
Power Factor	>0.9
IP Rating	IP40
Diffuser	Opal
Dimmable	DALI / Switch-Dim / Corridor / DSI
Beam Spread	78°
Colour Temperature	4000K
Housing Material	Polycarbonate
Operating Temperature	-20 to +45 °C
Input Voltage	AC220-240V, 50-60Hz
Dimensions	595mm x 595mm x 55mm
Weight	3kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
Emergency Output	3 Hours [3W]
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

\* Warranty terms and conditions apply

**Information is subject to change and can be withdrawn without notice**

For further information on our products or terms and conditions visit our website [www.qvis.co.uk/lighting](http://www.qvis.co.uk/lighting) or email: [sales@qvislighting.com](mailto:sales@qvislighting.com)