

# Modular



IP65 Ingress Protection



TP(a) Fire Rating




Easy-Clean Diffuser



Aluminium Housing


## Dimensions



10.5mm



## Photometric Data

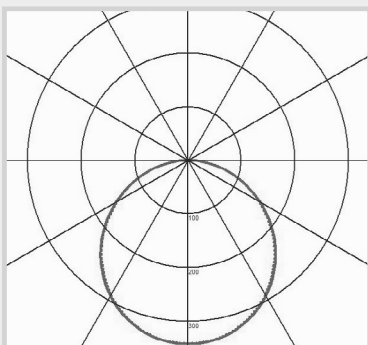

# Orion

## IP65 Rated Edge-Lit Panel

**QVIS**<sup>®</sup>  
LED LIGHTING

CODE: ORN-40P-6x6NW-65-FB



Power	Efficacy	Output	Kelvin
40W	110Lm/cW	4400Lm	4000K

## Technical

Input Voltage	AC 220-240V
Colour Rendering Index	>85
Beam Spread	160°
Diffuser Type	Opal
Power Factor	>0.9
Typical UGR	<19
Operating Temp.	-20 to +50°C
Materials	Aluminium
IP Rating	IP65
Fire Rating	TP(a)
Dimmable	On Request
Dimensions	595mm x 595mm x 10.5mm
Weight	2.5kg
MacAdam Step	<3
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS