

Helios Slimline Downlight (110mm)

Downlight Range

CODE: H65-10-110CW/QD

QVIS[®]
LED LIGHTING



10W
Power

7YR
Warranty



OPAL
Diffuser


1150
Lumens




| Specification | Helios |
|------------------------|---|
| System Power | 10W |
| Driver Manufacturer | Q-Drive |
| LED Chipset | Samsung |
| Colour Rendering Index | >85 |
| Typical UGR | <19 |
| Lumen Output | 1150Lm |
| LED Efficacy | 115 Lm/cW |
| Power Factor | 0.9 |
| IP Rating | IP65 |
| Fire Rating | TP(a) |
| Diffuser | Opal |
| Dimmable | DALI / Switch-Dim / 1-10V |
| Beam Spread | 90° |
| Colour Temperature | 6000K |
| Housing Material | High Grade 6063 Aluminium Frame |
| Diffuser Material | Polycarbonate |
| Operating Temperature | -20 to +65 °C |
| Input Voltage | AC200-240V, 50-60Hz |
| Cut Out Diameter | 95mm |
| Dimensions | 110mm x 24mm |
| Weight | 0.3kg |
| MacAdam Step | <3 |
| Lifetime | 50,000 hours, L70-B10 (Ta 25 °C) |
| CE Standards | EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3- 3, EN62722-1, EN62722-2-1 and EN50581 |
| CE Directives | LVD, EMC, ERP & RoHS |

* Warranty terms and conditions apply

TECHNICAL DRAWINGS

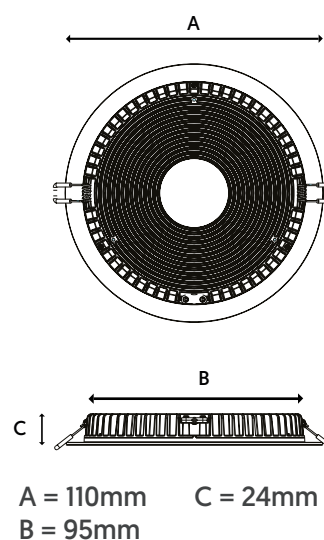

LUMINOUS INTENSITY DISTRIBUTION

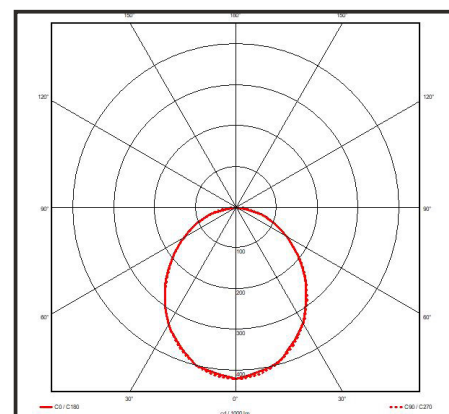

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com