



HELIOS SLIM-LINE DOWNLIGHT

H65-10-110NW/TD

QVIS[®]

LIGHTING & SECURITY




Driver Manufacturer




LED's Inside

TECHNICAL DRAWINGS

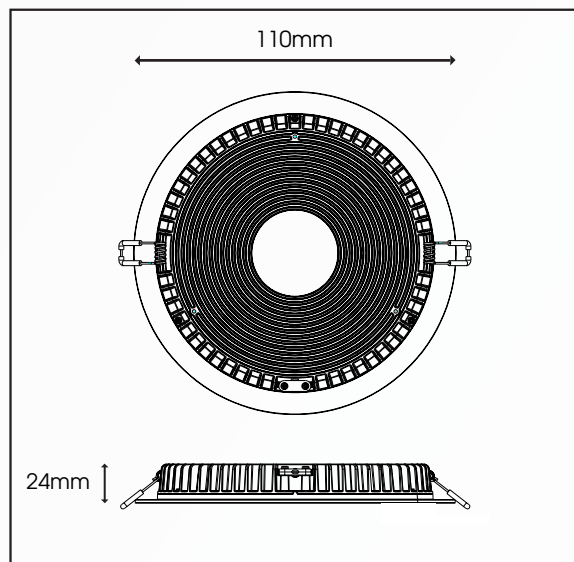

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

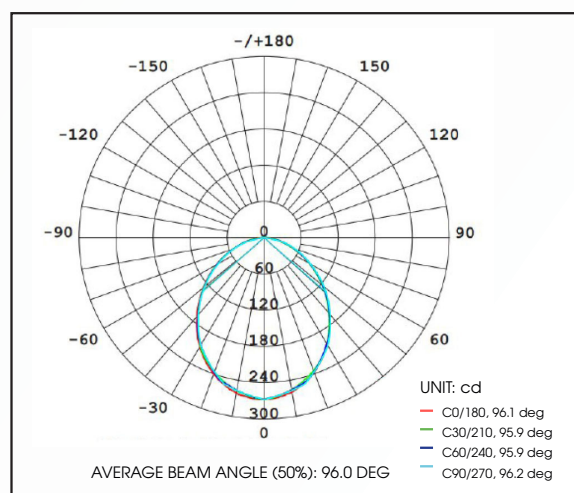

Specification	Helios 110
System Power	10W
Driver Manufacturer	Tridonic
LED Chipset	Samsung
Diffuser	Opal
Colour Rendering Index	>85
Typical UGR	<19
LED Efficacy	115 Lm/cW
Lumen Output	1150Lm
Fire Rating	TP(a)
Dimmable	Dali / Switch-Dim / Corridor / DSI
Power Factor	0.9
IP Rating	IP65
Beam Spread	90°
Colour Type	Single
Colour Temperature	4000K
Housing Material	High Grade 6063 Aluminium
Cut Out	95mm
Operating Temperature	-20 to 50 °C
Input Voltage	AC 200-240V, 50-60Hz
Weight	0.3kg
Dimensions	110mm x 24mm
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply



For further information on our products or terms and conditions visit our website
www.qvisled.com or email: sales@qvislighting.com

MODULAR & RECESSED RANGE