

Helios Slimline Downlight (110mm)

Downlight Range

CODE: H65-10-110WW/QD

QVIS[®]
LED LIGHTING



10W
Power

7YR
Warranty



OPAL
Diffuser


1150
Lumens




Specification	Helios
System Power	10W
Driver Manufacturer	Q-Drive
LED Chipset	Samsung
Colour Rendering Index	>85
Typical UGR	<19
Lumen Output	1150Lm
LED Efficacy	115 Lm/cW
Power Factor	0.9
IP Rating	IP65
Fire Rating	TP(a)
Diffuser	Opal
Dimmable	DALI / Switch-Dim / 1-10V
Beam Spread	90°
Colour Temperature	3000K
Housing Material	High Grade 6063 Aluminium Frame
Diffuser Material	Polycarbonate
Operating Temperature	-20 to +65 °C
Input Voltage	AC200-240V, 50-60Hz
Cut Out Diameter	95mm
Dimensions	110mm x 24mm
Weight	0.3kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3- 3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

TECHNICAL DRAWINGS

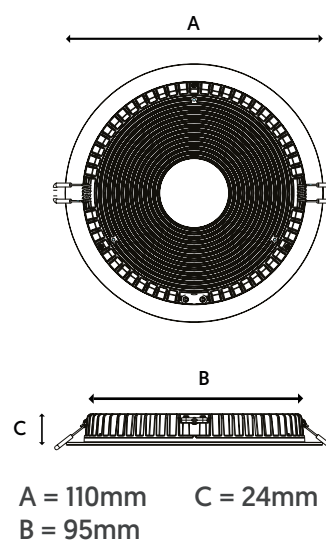

LUMINOUS INTENSITY DISTRIBUTION

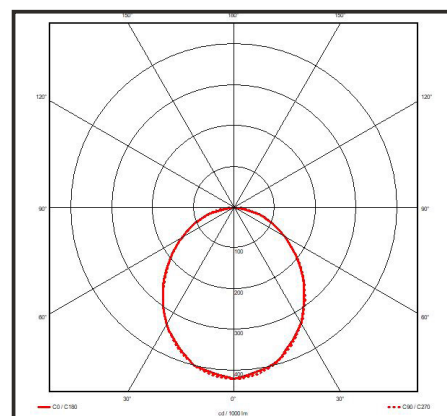

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com