


SFR Lite All-In-One Fixed Fire Rated


Downlight Range

CODE: SFR-LITE-5CS

QVIS[®]
LED LIGHTING

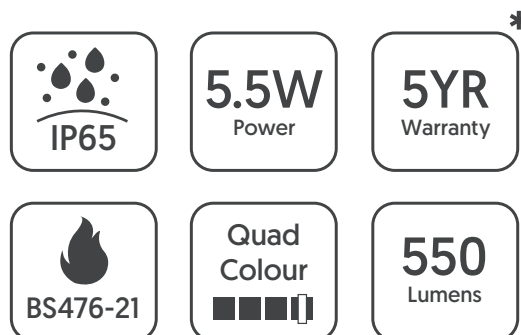

TECHNICAL DRAWINGS

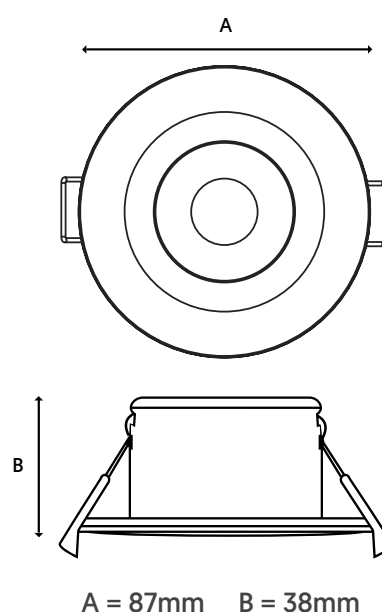


A = 87mm B = 38mm

Specification	SFR Lite
System Power	5.5W
Driver Manufacturer	Q-Drive
LED Chipset	Epistar
Colour Rendering Index	>80
Lumen Output	550Lm
LED Efficacy	100 Lm/cW
Power Factor	>0.9
IP Rating	IP65 from fascia
Fire Rating	BS476-21 (30/60/90 Minute)
Dimmable	Trailing Edge (20 Fittings Max.)
Beam Spread	60°
Colour Temperature	2700K / 3000K / 4000K / 6000K
Housing Material	Aluminium & Steel (Fascia)
Twist-On Bezels	White (Others Available Separately)
LED Type	SMD
Input Voltage	AC230V, 50/60Hz
Cut Out Diameter	65mm
Dimensions	87mm x 38mm
Weight	0.4kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

LUMINOUS INTENSITY DISTRIBUTION

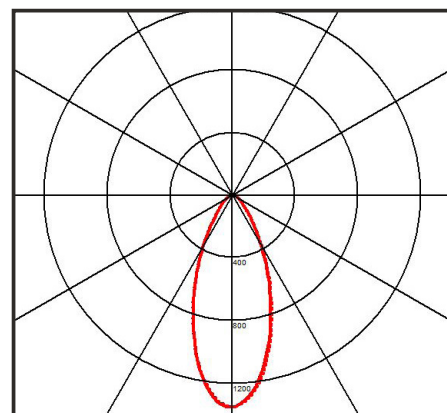

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com