

ON-X Back-Lit Panel (12x3)

Modular & Recessed Range

CODE: OX-BL-35-12X3CW

QVIS[®]
LED LIGHTING



35W
Power

5YR
Warranty




OPAL
Diffuser

3675
Lumens




TECHNICAL DRAWINGS

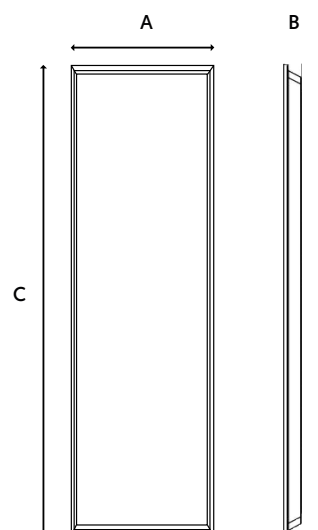

A = 295mm C = 32mm
B = 1195mm

LUMINOUS INTENSITY DISTRIBUTION

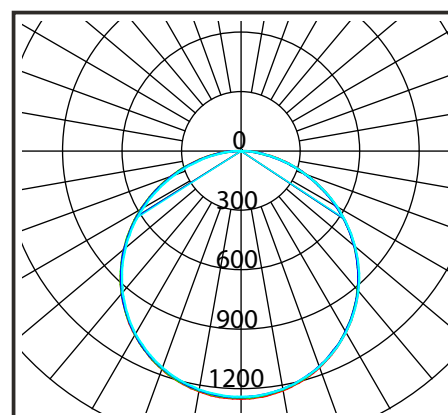

Specification	On-X
System Power	35W
Driver Manufacturer	Q-Drive
LED Chipset	Epistar
Colour Rendering Index	>80
Typical UGR	<22
Lumen Output	3675Lm
LED Efficacy	105 Lm/cW
Power Factor	>0.95
IP Rating	IP44
Fire Rating	TP[b]
Diffuser	Opal
Dimmable	On Request
Beam Spread	120°
Colour Temperature	6000K
Housing Material	Aluminium
Operating Temperature	-20 to +45 °C
Input Voltage	AC200-240V, 50-60Hz
Dimensions	1195mm x 295mm x 32mm
Weight	1.7kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com