
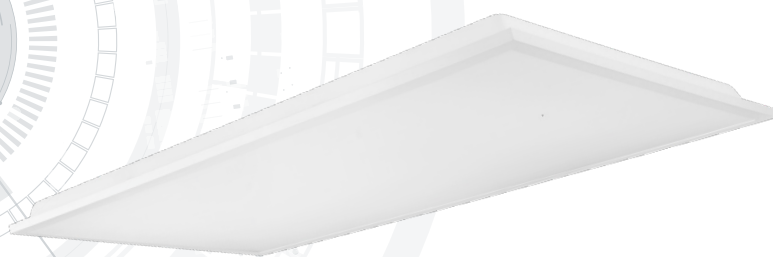


# ON-X Back-Lit Panel (12x6)


Modular & Recessed Range

CODE: OX-BL-60-12X6CW

**QVIS**<sup>®</sup>  
LED LIGHTING



## TECHNICAL DRAWINGS

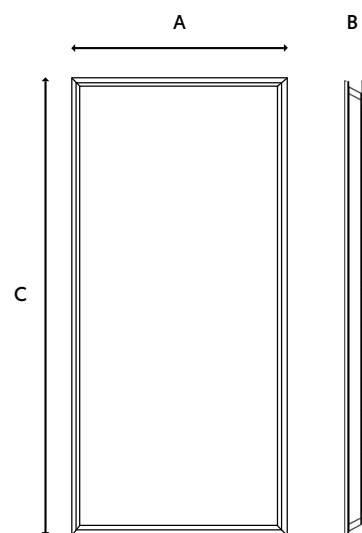


A = 595mm    C = 1195mm  
B = 32mm

| Specification          | On-X                                                                                                             |
|------------------------|------------------------------------------------------------------------------------------------------------------|
| System Power           | 60W                                                                                                              |
| Driver Manufacturer    | Q-Drive                                                                                                          |
| LED Chipset            | Epistar                                                                                                          |
| Colour Rendering Index | >80                                                                                                              |
| Typical UGR            | <22                                                                                                              |
| Lumen Output           | 6300Lm                                                                                                           |
| LED Efficacy           | 105 Lm/cW                                                                                                        |
| Power Factor           | >0.95                                                                                                            |
| IP Rating              | IP44                                                                                                             |
| Fire Rating            | TP[b]                                                                                                            |
| Diffuser               | Opal                                                                                                             |
| Dimmable               | On Request                                                                                                       |
| Beam Spread            | 120°                                                                                                             |
| Colour Temperature     | 6000K                                                                                                            |
| Housing Material       | Aluminium                                                                                                        |
| Operating Temperature  | -20 to +45 °C                                                                                                    |
| Input Voltage          | AC200-240V, 50-60Hz                                                                                              |
| Dimensions             | 1195mm x 595mm x 32mm                                                                                            |
| Weight                 | 4kg                                                                                                              |
| MacAdam Step           | <3                                                                                                               |
| Lifetime               | 50,000 hours, L70-B10 (Ta 25 °C)                                                                                 |
| CE Standards           | EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581 |
| CE Directives          | LVD, EMC, ERP & RoHS                                                                                             |

\* Warranty terms and conditions apply

## LUMINOUS INTENSITY DISTRIBUTION

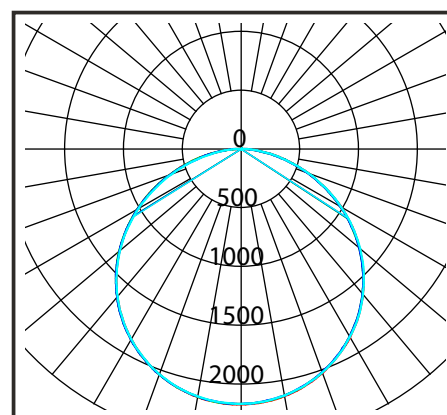

**Information is subject to change and can be withdrawn without notice**

For further information on our products or terms and conditions visit our website [www.qvis.co.uk/lighting](http://www.qvis.co.uk/lighting) or email: [sales@qvislighting.com](mailto:sales@qvislighting.com)